


CF6C - T5 linear coving lighting system

An efficient high output, linear lighting system. T5 fluorescent tubes are set within the 63x63mm aluminium profile and overlapped to ensure a continuous wash of light with no dark spots and a neat, easy to clean installation.

Electronic high frequency ballasts give a flicker free start and long lamp life with optional 1-10V dimming. White reflectors mean that light output is broad and diffused.

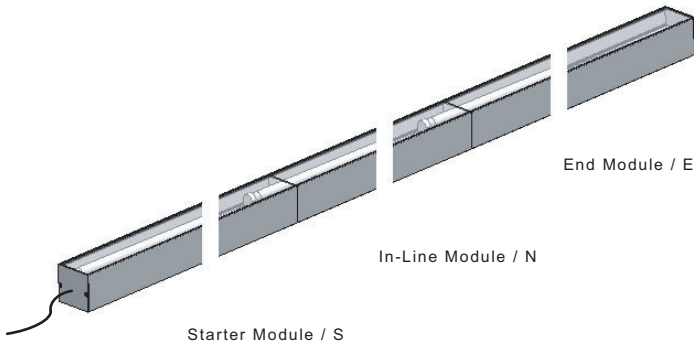


CF6C provides continuous linear illumination for concealment within cornices, coving, lighting of shelves or any area where a 'wash' of light is desired.

Designed with clear snap-in diffuser (which provide access to tubes and gear trays) and clean sided bodies, the systems can be fixed flush, or surface mounted. It is a modular system with integral ballasts and lengths based on T5 lamps lengths. Wiring for power and dimming interconnects through the system.

How to Specify CF6C

Modules are available as "starter", "in-line" and "end" variants, and as a "stand alone" unit. A continuous run must include a starter and end module and then be "in-filled" with the in-line modules - all lamps have the same surface brightness so wattages can be mixed. Ask for the spreadsheet of available length combinations to make life easier.

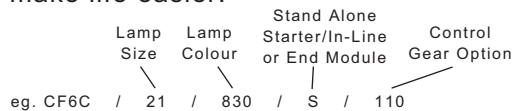

Description	Product Code Suffix	Stand alone Module Length /A	Starter Module Length /S	In-line Module Length /N	End Module Length /E
High Efficiency Lamps					
14W	CF6C/14	581	513	----	513
21W	CF6C/21	880	811	744	811
28W	CF6C/28	1180	1111	1042	1111
35W	CF6C/35	1480	1412	1344	1412
High Output Lamps					
24W	CF6C/24	581	513	----	513
39W	CF6C/39	880	811	744	811
54W	CF6C/54	1180	1111	1042	1111
80W	CF6C/80	1480	1412	1344	1412



Options for CF6C

Lamp options	Suffix
3000K White	/830
4000K Cool white	/840
6000K Daylight	/860

Red, Green and Blue coloured lamps are also available.

Contral gear options	Suffix
Non dimmable	/NDG
Dimmable 1-10V	/110
Dimmable DALI	/DALI

Fixing Details / sizes for CF6C

