


LED

LightGraphix

20 Bourne Road Ind. Park, Crayford, Kent DA1 4BZ

LD56 / LD256


Similar to LD46 but with 5mm Borofloat glass which is set in flush and creates a walkover fitting waterproof to IP68. A tougher fitting suitable for wet areas like steps up from a swimming platform

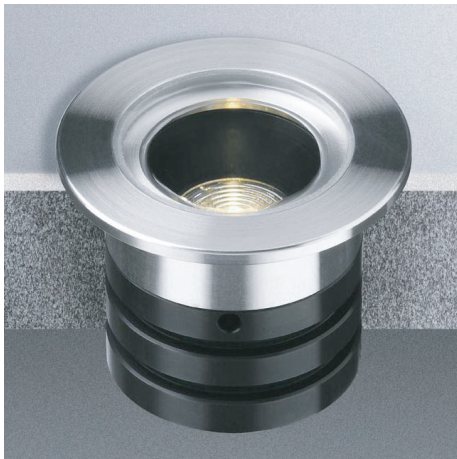

Use with 1W (350mA) or 2W (700mA) Drivers. See catalogue (edition 9) page 86 - 89 for wiring diagrams and drivers.

LD56T / LD256T

'Tilted' lens version for wall washing or column uplighter, works particularly well with a 6° lens.

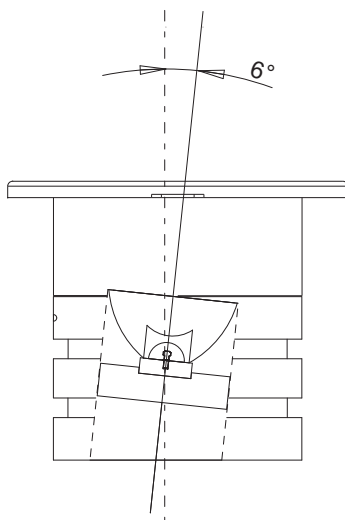
IP 68
Options for LD56 / LD256 / LD256T / LD256T**Lens + LED Options****Suffix**

1W 350mA LED	LD56 / LD56T
2W 700mA LED	LD256 / LD256T
6° spot lens	/06
15° flood lens	/15
8 x 25° fresnel 'spreader' lens	/85

LED Colour**Suffix**

Warm white (3000K)	/LWW
White (5000K)	/LW
Blue	/LB
Green	/LG
Red	/LR
Amber	/LA

Bezel finish options

Stainless steel 316 (Standard)
Polished stainless steel
Powder coated white / black

Fixing Details / sizes**Options: -**

'O' Rings and Sleeve
/476

Or

Spring Clips
/SC
For indoor use

