

LD175

Square Recessed Low Glare Wall Light



Install sheet - Page 1

SPECIFICATION


LED surfaced mounted luminaires are class III for Safety Extra Low Voltage **DC** supply. The product should only be used with a supplied or LightGraphix approved **350mA or 500mA** constant current driver.

Suitable for mounting on normally flammable surfaces.

Lamp: **E3 LED Engine.**
This fitting is **IP67** rated.
Lumen Maintenance: L90B5 at 90,000hrs.


LD175-E3 & LD175-AU-E3			
Product & LED Output Code	Power Output	Max Ambient	Energy Class
LD175-E3-350	350mA 5W	-20°C to 45°C	D
LD175-E3-500	500mA 7W		E
LD175-AU-E3-350	350mA 5W	-20°C to 25°C	D
LD175-AU-E3-500	500mA 7W		E

ORIENTATION




REMOVAL

Use putty knife or scraper and carefully pry out enough of the fitting to get a purchase on the bezel edges. Use hands where possible to avoid damage to the fitting. No excessive force is required. Do not use screw drivers.




DIAGRAM

/SC
Spring Clips



DIAGRAM

/CB
Concrete Box

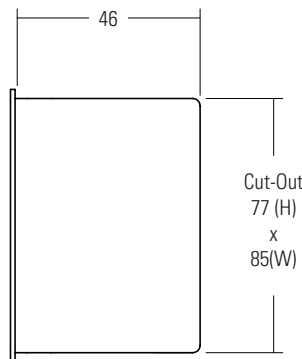

INSTALLATION

/SC
Spring Clips

1. Prepare cut-outs to suit dimensions below.
2. Wire the luminaire to a specified driver ensuring the power is turned off.
NOTE: Connections in wet environments. Make IP68 connection to stop water travelling up the cables into the fittings! Refer to IP connection sheet for further details.
3. Install fitting by compressing the springs and pushing it into the hole. The glass window should sit closest to the lit surface.
4. Once the fitting has been wired up and is correctly installed it can be turned on.


INSTALLATION

/CB
Concrete Box

1. Secure housing using no.6 or no.8 screws and attach conduit (if required).
2. Once the first fix is secured feed the cable through the conduit and attach to the fitting ensuring the power is turned off.
3. If the fitting is supplied with spring clips please remove before attempting to install the fitting.
4. Insert the fitting into the concrete box ensuring the glass window should sit closest to the lit surface.
5. Once the fitting has been wired up and is correctly installed it can be turned on.

LED & CONTROL GEAR SEPARATION DISTANCES

Warning – Risk of overheating or fire if the clearance distances are compromised. Building insulation must not cover the control gear.



SEE CONSTANT CURRENT WIRING SHEET FOR IN SERIES WIRING DIAGRAM

Do not power up until fitting is wired correctly! Constant current LEDs must be wired in series, polarity is critical. Please refer to specified driver sheet for details on the minimum and maximum number of LEDs per circuit. To be used in conjunction with an eldoLED ECOdrive 361/A.


CORE COLOUR & POLARITY		
Colour of Cable	Red	Black
Polarity	+	-

IMPORTANT

Make sure that all cables and connections are securely connected before switching on the power. Failing to do this can lead to failure of the LEDs and/or the driver. If the LEDs do not work upon power up, turn off the power source immediately and check the polarity of the wiring. Any attempt made to open up and/or modify the luminaire will invalidate the manufacturers warranty. The external cable of this luminaire cannot be replaced; if the cable is damaged the luminaire shall be destroyed. This is inclusive of but not limited to removal of the LightGraphix product label or removal of any parts from the main body of the product including bezels, electrical components and factory fitted fixing methods (unless otherwise stated in these instructions). Luminaire should be wired no further than 30 meters away from a SELV constant current LED driver (based on a 1mm squared cross sectional cable). Forward voltage of luminaire is 18VDC, if wired in series UOOUT of LED driver and luminaire circuit should not exceed 60VDC. Terminal block not included. Installation must be performed by a qualified person. For connections made in dry environments 2 x Wago 221-2411 or connections with similar specifications are recommended. For damp or wet environments a connector of the same electrical specification but with a suitable IP rating should be used.

END OF LIFE

This fitting contains a replaceable (LED only) light source, that must be replaced by a professional. If the product has come to the end of its life or is in need of repair please contact LightGraphix or your preferred recycling scheme.



MAINTENANCE

Clean with soft damp cloth
LED: Please contact LightGraphix
O-ring replacement part numbers: N/A

CONNECTION

- Wire Connection Method: Clamp
- No. of Positions: 1Way
- Rated Voltage: 450V
- Rated Current: 32A
- Wire Size (stranded): 18 - 14AWG