

LD38S & LD38C

HIGH-POWER MOUNTED EXTERIOR LED LINEAR SURFACE GRAZER



LD38 is a high-power linear surface grazer offering superb continuous wall washing capabilities. Compact with a minimal design, lengths are made to measure up to 2100mm, with evenly maintained spacing across LEDs, resulting in no shadows. White, RGBW and Tunable White engines are available along with a choice of optics for wall washing or flood lighting, various mounting options and glare control accessories, offering great flexibility for a variety of applications. For additional glare control, LD38C can be specified and is supplied with an integrated anti-glare cowl.

KEY FEATURES

- > Linear C1 engine featuring NICHIA LED delivering up to 3749lm
- > Custom lengths up to a maximum of 2100mm, with LED spacings of 50mm, 75mm, 100mm
- > Short pieces can be made interlinked to accommodate curves
- > Spacing is maintained across multiple lengths, ensuring no dark spots
- > Superb continuous wall washing capabilities with high efficiency optics and a choice of narrow to oval beam angles available
- > Aluminium extrusion, anodised to a thickness of 25 microns and available in a wide range of powder coated paint finishes
- > Range of glare control options including anti-glare louvre accessories or the LD38C for an integrated anti-glare cowl
- > Wide range of mounted or ground spike options for use in a variety of applications
- > Switched, 0-10V, Casambi, DMX, DALI and Mains dimmable drivers available


DIMENSIONS

Dimensions in mm

For fixing dimensions please go to page 5.



LD38S

Standard LD38



LD38C

Integrated linear anti-glare cowl, supplied with special end caps to further reduce glare from the sides

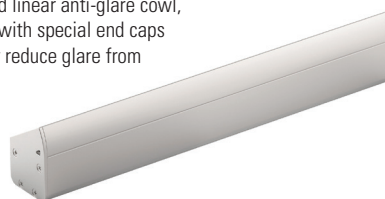

Photography: Gavriil Papadiotis (www.gavriilux.com)

Design: Lighting Design International | Project: Four Seasons Astror Palace Hotel, Athens, Greece | Product: LD38

WHITE LED ENGINE SPECIFICATION

Engine	 Linear C1		
Beam angles	12°, 31°, 48°, 12° x 36°, 15° x 60°		
LED manufacturer	NICHIA		
Colour temperature	2200K / 2700K / 3000K / 4000K / 5000K		
Current	350mA	500mA	700mA
LED power (Max) per LED**	1.2W	1.7W	2.4W
Forward voltage (V ₁₀₀) per LED	3V	3.2V	3.4V
Delivered lumens (L ₁₀₀)*			
50mm spacing	2160	2820	3760
75mm spacing	1436	1875	2500
100mm spacing	1080	1410	1880
Lumens per circuit watt	90	83	78
CRI (Typ)	93		
Colour consistency	2SCDM		
Peak intensity	20,806 cd		
LED lumens (at max output) per LED	206lm		
LOR	0.94		
TM30	RF93	RG99	
LED lifetime	L90B5 at 90,000hrs		
Applications	   		

Data is based on LD38-C1-700-LW30-NB

*Lumen output data applies to all colour temperatures

**indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

MECHANICAL


Ambient temperature	-20° to 45° (350mA, 500mA) or -20° to 35° (700mA)
Glass	4mm thick low iron glass
Materials	Anodised aluminium body and end caps to 25 microns
IP rating	IP67
Wiring	In-series constant current wiring, pre-wired at a length of 2m which can be specified up to 10m at extra cost

AVAILABLE FINISHES

LD38 has been designed for extreme environments, so only high quality materials and finishes are used to ensure long lasting reliability. All parts are silver anodised to a minimum thickness of 25 microns which offers high protection in all external environments. RAL powder coat paint finishes are also available, allowing the LD38 to blend into the surrounding architecture.



SILVER ANODISED




ANTIQUE BRONZE



SATIN ANTIQUE BRASS



SATIN BRASS




BLACK (RAL 9005)



ANTHRACITE GREY (RAL 7016)



WHITE (RAL 9016)






RAL COLOURS





DIMENSIONS & FIXING OPTIONS

Dimensions in mm




/BSM Bracket side mounting




/ABM Surface adjustable bracket mounting



/AWB-50 Adjustable wall bracket 50mm




/AWB-300 Adjustable wall bracket 300mm
For custom dimensions please contact us

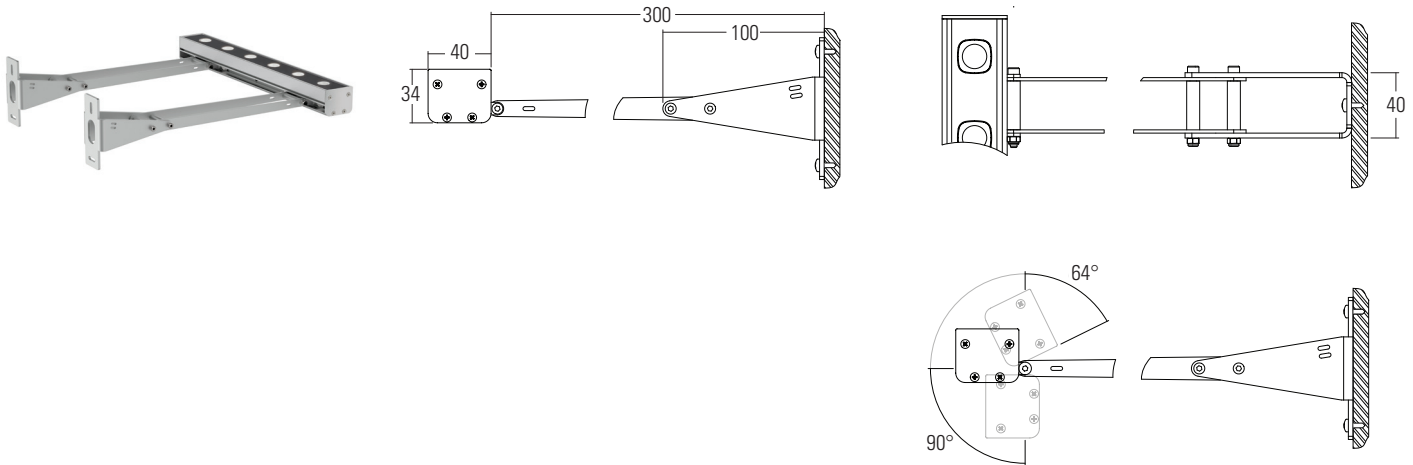


/GS Ground spike

The ground spike accessory enables the use of the LD38 as an alternative to conventional spotlights. It offers linear lighting for a range of landscape and garden lighting effects such as lighting hedge rows, walls, or around trees with multiple short pieces used to create a curve. It can be specified with wider LED spacing to suit the budget or light output needed.

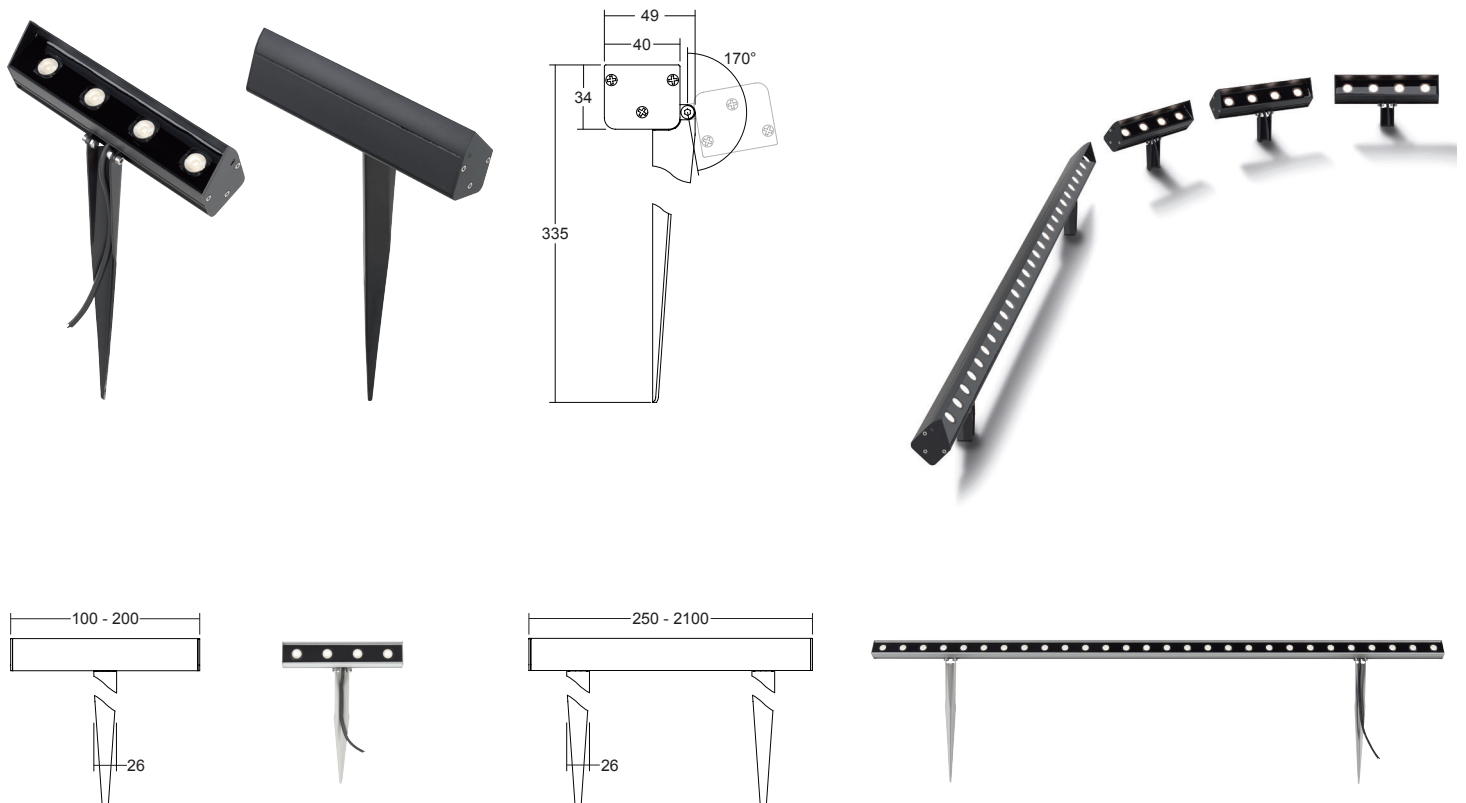


MADE TO MEASURE

Custom made lengths allow the designer to specify the exact length required. Spacing of 50mm, 75mm and 100mm are maintained across multiple lengths, so no dark spots are created.

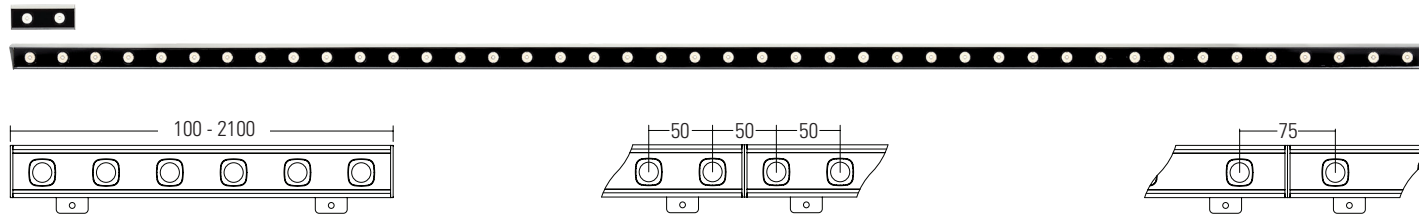

BEAM ANGLE OPTIONS

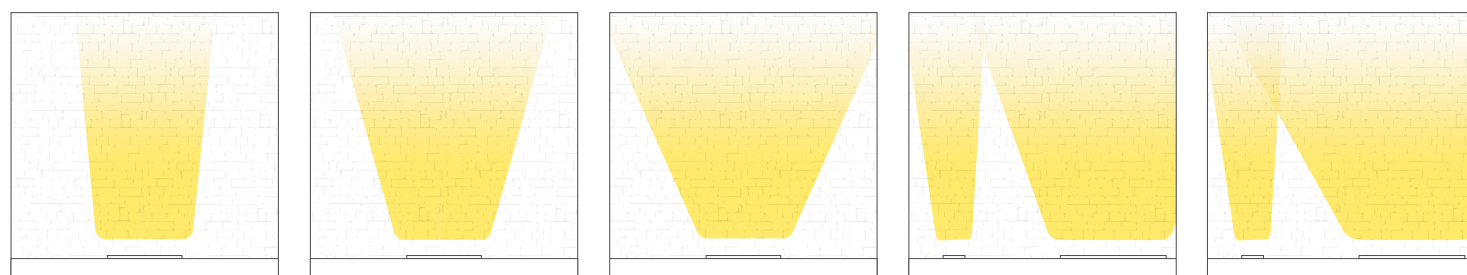


/NB
Narrow Beam
12°

/MB
Medium Beam
31°

/WB
Wide Beam
48°


/OB
Oval Beam
12° x 36°

/EOB
Extra Oval Beam
15° x 60°

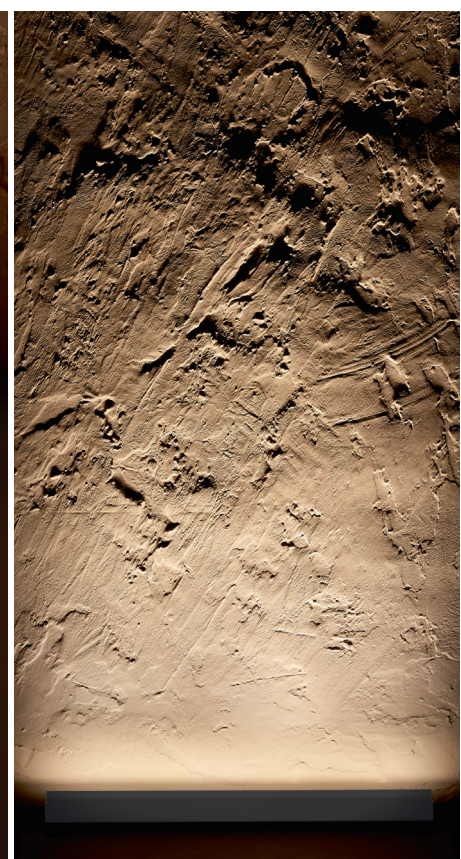

APPLICATION & MOUNTING OPTION GUIDE

LD38 is incredibly versatile so can be used to illuminate an entire external project in applied in various scenarios. From high-power wall grazing, window reveals, floodlighting and landscape illumination, there is a fixing accessory and specification to suit. Made to measure lengths allow effects to be created for particular details. If the required fixing or accessory is not featured please get in touch.

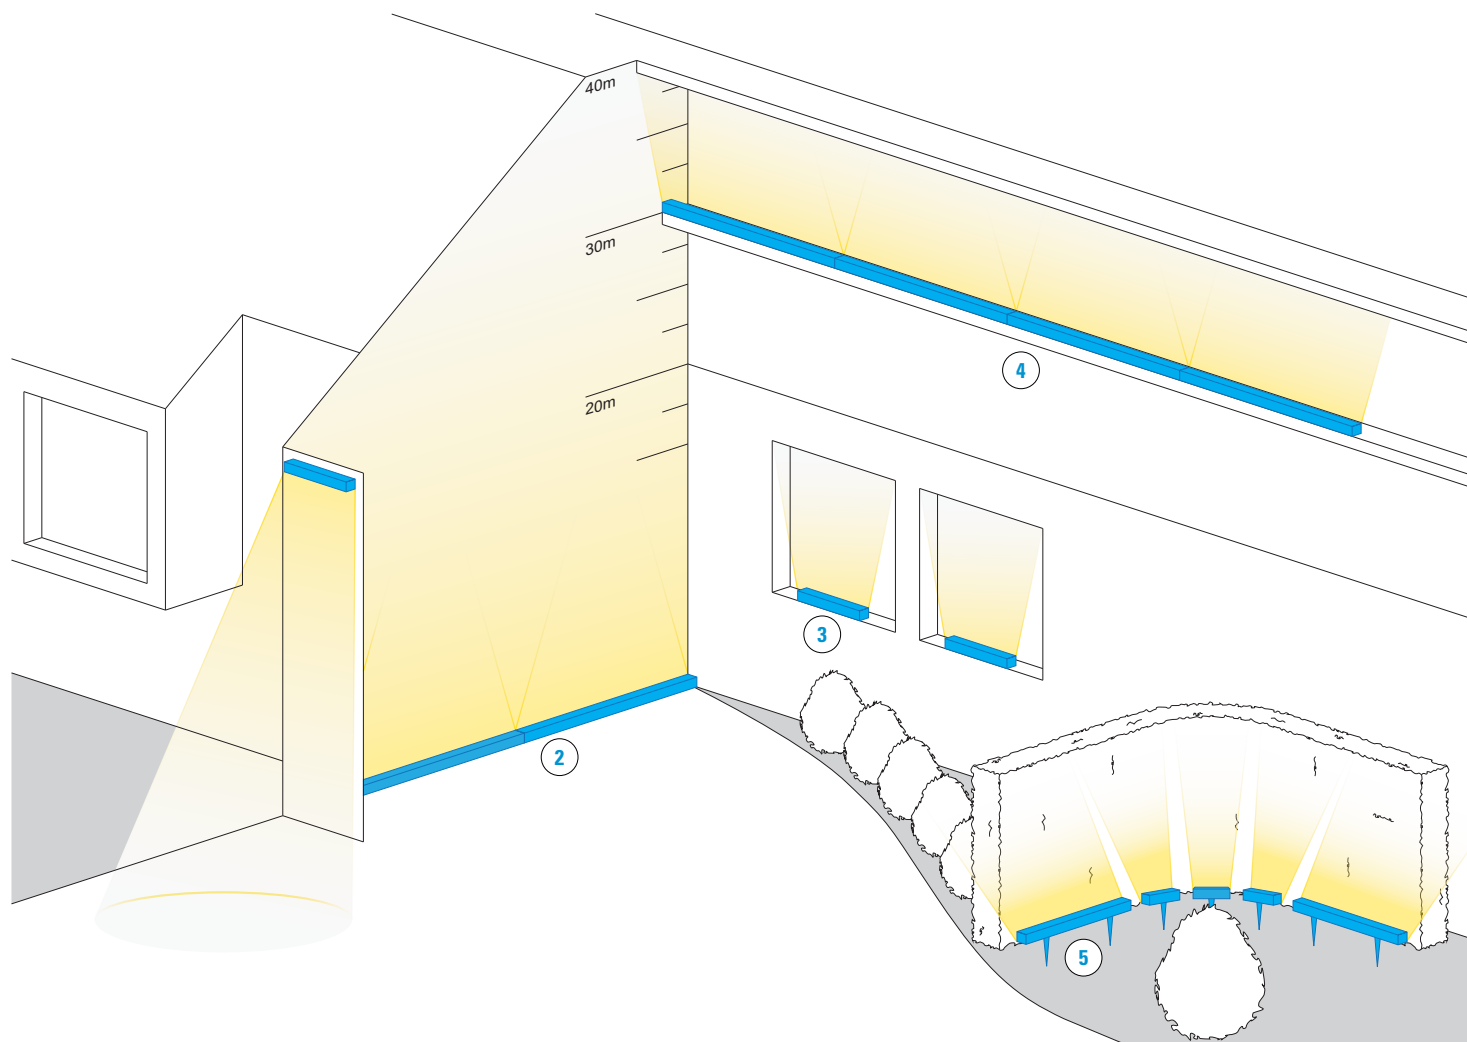

MOUNTING OPTIONS:

①

/AWB-50



/AWB-300



②

/AWB-50



/AWB-300



③

/ABM



/BSM



④

/ABM



/BSM



⑤

/GS





LINKED APPLICATIONS

LD38 can be specified in short interlinked sections for curved applications such as trees or columns. Two channels can be used to provide up to 28 LEDs at 500mA or 26 at 700mA.

Design advice

This section provides advisory module quantities and lengths to ensure drivers are used to their full potential. Custom module and link lengths can be specified.

LED spacing	Module length	No. of modules
350mA / 500mA		
50mm spacing	200mm (4 LEDs)	Maximum of 28 LEDs on 2 channels, resulting in 7 modules of 4 LEDs
75mm spacing	300mm (4 LEDs)	
700mA		
50mm spacing	200mm (4 LEDs)	There is a maximum of 26 LEDs on 2 channels, resulting in 6 modules of 4 LEDs
75mm spacing	300mm (4 LEDs)	

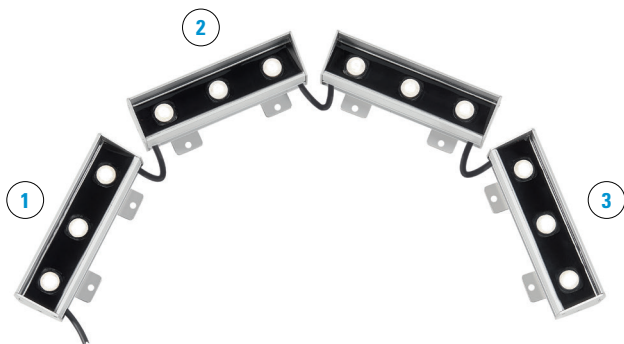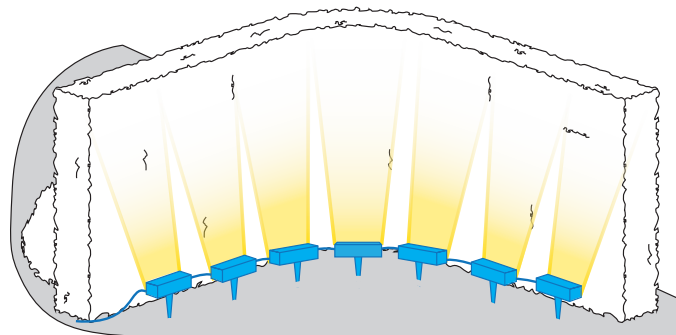

Note: Standard linked cable length - 100mm.

Specifying linked LD38

Using the order codes and options table on the last page, specify the fitting output, LED colour, LED spacing, beam, finish and mounting method, then use the guide below to specify the individual modules. See example code and image below.

Example:

2025mm required = 1 x 300mm linked starter, 5 x 300mm linked middle, 1 x 225mm linked end

	Feed length	Module length	Linked length	Quantity
1 Linked starter -	2m	150mm	100mm	1
2 Linked middle -		150mm	100mm	2
3 Linked end -			150mm	1

The following is an example code of how the code is broken down if an exact length is specified.

Specification:

LD38-C1-700 / LW30 / 50 / OB / White / AWB-50 / IP67 / CO


ACCESSORIES

Anti-glare louvre


Please note the /GL is supplied as standard, available in black only and used to prevent glare from the viewers looking towards the surface being lit. The reversed GLF orientation is useful for applications where the LD38 is placed outside on a window ledge, to prevent glare from the perspective of the viewers inside the building looking out.



/GL
Standard orientation of louvre



/GLF
Orientation available on request

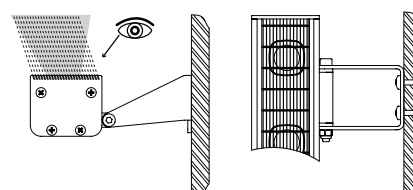

ORDER CODES & OPTIONS



Example: LD38C-C1-700 / LW30 / 50 / OB / Silver / AWB-50 / GL / 500mm

Light Engine & Drive Current	LED Colour	LED Spacing	Beam Angle	Finish	Fixing	Accessory	Length (Up to 2100mm)
LD38 -	/	/	/	/	/	/	/

WHITE LED ENGINES



LINEAR C1 ENGINE

1.2W LED at 350mA	LD38C-C1-350 LD38S-C1-350	Super Warm White (2200K)	/LW22	50mm /50 75mm /75 100mm /100	12° Narrow spot /NB 31° Medium /MB 48° Wide /WB 12° x 36° Oval Beam /OB 15° x 60° Extra Oval Beam /EOB			
1.7W LED at 500mA	LD38C-C1-500 LD38S-C1-500	Extra Warm White (2700K)	/LW27			Paint Finish - Silver	/AWB-50	/GL
2.4W LED at 700mA	LD38C-C1-700 LD38S-C1-700	Warm White (3000K)	/LW30					
		White (4000K) - on request	/LW40			Paint Finish - Antique Bronze	/AWB-300	/GLF
		Cool White (5000K)	/LW50					
		Red	/LR			Paint Finish - Satin Antique Brass	/ABM	
		Green	/GR					
		Blue	/LB			Paint Finish - Satin Brass	/BSM	
		Amber	/LA					
						Paint Finish - Black (RAL 9005)		
								
						Paint Finish - Anthracite Grey (RAL 7016)		
								
						Paint Finish - White (RAL 9016)		
								
						Paint Finish - RAL		

DYNAMIC LED ENGINES



RGBW

3.5W LED at 350mA	LD38C- RGBW-350 LD38S- RGBW-350	75mm /75	60° Wide /WB
5W LED at 500mA	LD38C- RGBW-500 LD38S- RGBW-500		

Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers
We have a range of dimmable LED drivers including DMX and DALI compatible.
Please see the downloads section on our website.