


LD151T

HIGH-POWER TILTED INTERIOR/EXTERIOR LED UPLIGHT



The LD151T is a powerful interior and exterior uplight with a compact size and depth that has been designed with the LED and optics at a 6° tilt. This feature focuses the light onto the lit surface reducing spill onto any ceiling or canopy. By angling the light it reduces glare and allows installation further away from the wall or column. This product can be specified with a wide range of options allowing it to suit many project requirements with multiple bezel finishes to choose from as well as accessories, including its own unique glare shield. The E3 engine delivers a high output of 626lm, 12° narrow beam, and both engines are available in a wide range of colour temperatures from 2200K to 5000K. When used with an oval beam the LD151T offers a superb wall washing effect. The bezel aesthetic is minimal and features black trim glass and no visible fixings. This is a very tough, high quality fitting, machined from high grade materials, ensuring excellent thermal and light output performance.

KEY FEATURES

- > E3 engine with NICHIA LED, delivering up to 626 lumens when specified at 700mA with concrete housing in 3000K
- > Available in a wide range of colour temperatures from 2200K to 5000K.
- > Optics set at a 6° tilt to focus the beam onto the lit surface from a distance with glare angled away from view
- > Half-moon glare shield option to minimise the view of the intense light source without affecting the wash of light on the wall/column
- > Straight cut edged bezel available in 316 Stainless Steel, Polished & Passivated 316 Stainless Steel, Machined Brass, Flamed Solid Bronze, and RAL paint finishes
- > Optics recessed within a black anodised body for reduced glare
- > Multiple optic options for lighting columns, arches or wall washing in interior and exterior applications, rated IP67
- > Toughened glass with ceramic black trim
- > Fitting rated IK08
- >  Contains our integral moisture guard (anti-wicking barrier), stopping water ingress from going up the cable into the product from incorrect IP-rated connections
- > Hidden fixing options include first fix sleeve, ground tube and concrete housing
- > Switched, 0-10V, Casambi, DMX, DALI or Mains dimmable drivers available




DIMENSIONS

Dimensions in mm

For full dimensions please go to page 3.



SPECIFICATION

Engine	⊕ E3			⊙ F1		
Beam angles	12°, 19°, 34°, 54°, 15° x 49°			25°, 46°, 65°, 43° x 25°		
LED manufacturer	NICHIA			CREE		
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K			2200K, 2700K, 3000K, 4000K, 5000K		
Current [Rated Output]	350mA [5W]	500mA [7W]	700mA [10W]	350mA [3.5W]	500mA [5W]	700mA [7W]
Typical LED Circuit wattage	4.4W	6.4W	9.2W	3.3W	5W	7.2W
Delivered lumens (L ₁₀₀)*	372	487	626	163	215	308
Delivered lm/Circuit W**	84	76	68	49	43	43
Typical LED Source wattage	4W	5.8W	8.3W	3W	4.5W	6.5W
Source LED lm	574	740	949	377	497	654
Source lm/W	144	128	114	126	110	101
Forward voltage (V ₁₀₀)	11.3V	11.6V	11.8V	8.7V	9V	9.3V
CRI	85			90		
Colour consistency	2SDCM			3SDCM		
Peak intensity**	6,433 cd			1,565 cd		
LOR	0.66			0.47		
TM30	RF85 RG98			RF90 RG103		
UGR rating ('downlight' mounted) *****	2.9	3.8	5.1	3.4	4.4	5.5
BUG rating ('uplight' mounted)	B0-U3-G0			B0-U3-G0		
LED lifetime	L90B5 at 90,000hrs			L90B5 at 90,000hrs		
Applications	  					

These values are based around a LD151T-E3-700-LW30-NB & LD151T-F1-700-LW22-MSB

*Lumen output data applies to all colour temperatures

**Can only be specified with /484N concrete housing

***Indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver


****Lumen output indicated is without the glare shield. Allow 30% less with the /GS glare shield.

*****UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

Ambient temperature	E3	Soil	-20°C to 50°C (350mA-500mA) or -20°C to 25°C (700mA) in soil
		Concrete	-20°C to 50°C (350mA-700mA) in concrete
	F1	Soil	-20°C to 50°C (350mA-700mA) in soil
		Concrete	-20°C to 50°C (350mA-700mA) in concrete
Glass	6mm thick toughened glass with black ceramic screen print		
Materials	Stainless steel bezel, anodised aluminium body		
Weight of product	0.52kg		
IP rating	IP67		
IK rating	IK08		
Wiring	In-series constant current wiring (pre-wired with 2-core exterior cable at a length of 250mm)		

ENVIRONMENTAL

TM65	Available on request		
TM66	2.7		
Repair + Refurbish	 This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.		


AVAILABLE FINISHES

Please refer to our finishes guide for full details




316 STAINLESS STEEL

- > Marine grade 316 Steel
- > Standard machined finish
- > Extremely durable with very high corrosion resistance
- > Passivation recommended for marine environments to prevent corrosion and build up of brown stains caused by oxidation
- > Interior & exterior use



POLISHED & PASSIVATED 316 STAINLESS STEEL

- > Marine Grade 316 Steel
- > Mirror like finish
- > Extremely durable with very high corrosion resistance
- > Passivated to extensively prolong resistance to corrosion and brown stains caused by oxidation in marine environments
- > Interior & exterior use



MACHINED BRASS

- > Solid CZ121 Brass
- > Standard machined finish
- > Corrosion resistance rated fair to excellent
- > Please note a natural green/brown patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location.
- > Interior & exterior use



FLAMED SOLID BRONZE

- > Solid Bronze
- > Hand finished Flamed Bronze unique to LightGraphix
- > Extremely durable with very high corrosion resistance.
- > High wear resistance. Please note a natural dark patination layer will form after long term exposure to the elements, the extent of this discolouration will be dependant on its location.
- > Interior & exterior use



PAINT FINISH


- > Paint finish on Stainless Steel
- > Matt Black, Matt White, Bronze and other RAL colours available
- > Not recommended for footlights in high traffic areas
- > Options for interior & exterior use

DIMENSIONS AND FIXING ACCESSORIES

Dimensions in mm


/484S First Fix Sleeve

The fitting is supplied as standard with a fixing sleeve; this is bonded into the mounting surface first. The LD151 is secured into the sleeve by 2 'O' rings on the body. When pushed into the sleeve it creates a watertight seal.

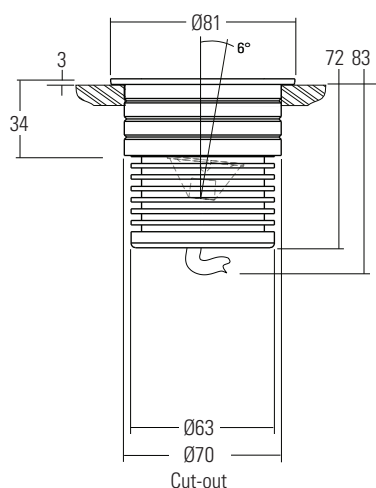


/SC Spring clip fixing

Suitable for use in surfaces with a thickness of 1mm – 25mm. Spring clips can provide a simple, single fix mounting method. We recommend that spring clips are only used in interior applications.

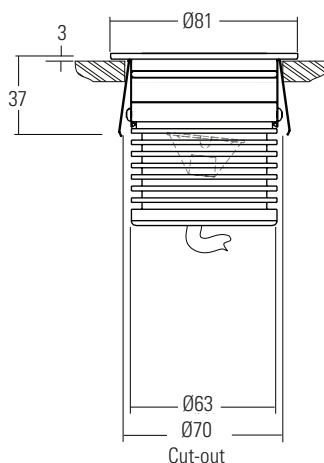



/484GT Ground tube

The in-ground tube has been designed for applications here a recessed uplight is required in soil or gravel surfaces. The tube can be buried with the necessary wiring, and then the fitting installed after the landscaping work has been completed. It is supplied with the fixing sleeve bonded into the tube and can be cut down on site.

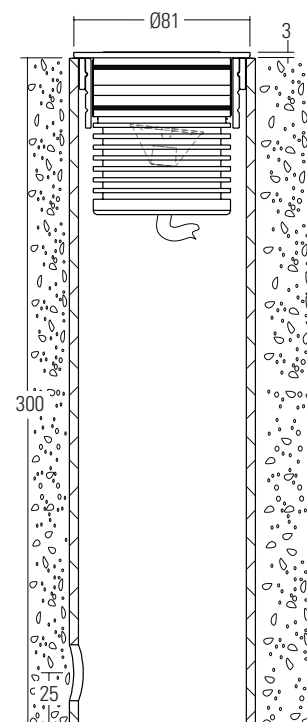

/484N or /484N-2 Concrete housing

Must be used when specifying the 700mA fitting. The aluminium housing is used as a heat sink which keeps the LED fitting cool through the thermal transfer of the heat within the housing to the surrounding concrete. The housings are big enough for IP rated connections to be made inside the housing and a second gland is available for cabling onto the next luminaire.

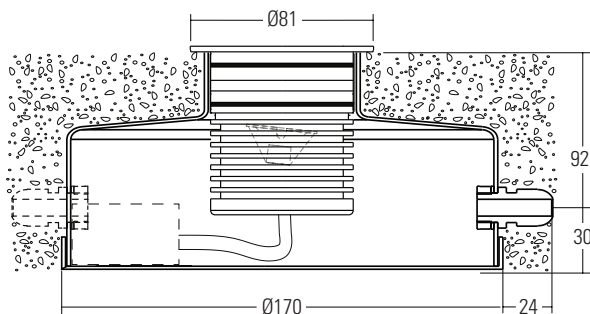

/484N
Concrete housing with 1x PG9 IP67 gland



/484N-2
Concrete housing with 2x PG9 IP67 gland

/ID Optional integral non dimming driver
(single colour only at 350mA or 500mA)



GLARE SHIELDS



/NGS No glare shield


No glare shield. Deep recessed optic and matt black anodised optic holder aids in glare reduction.



/GS Glare shield


Standard glare shield provides an excellent balance between glare control and light output. This accessory works well in most applications.

6° TILT

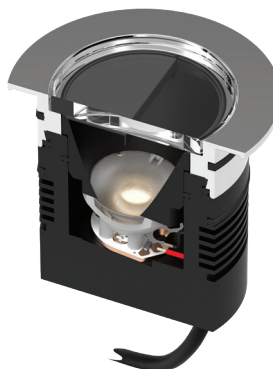

Both the LED and the optic are set at a 6° tilt, allowing for more efficient use of a glare shield, as more of the light output is directed towards the open aperture of the fitting.


Please refer to our photometric files for lumen data.



CONE DIAGRAMS


E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 700mA, 10W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD151T product page on the website.

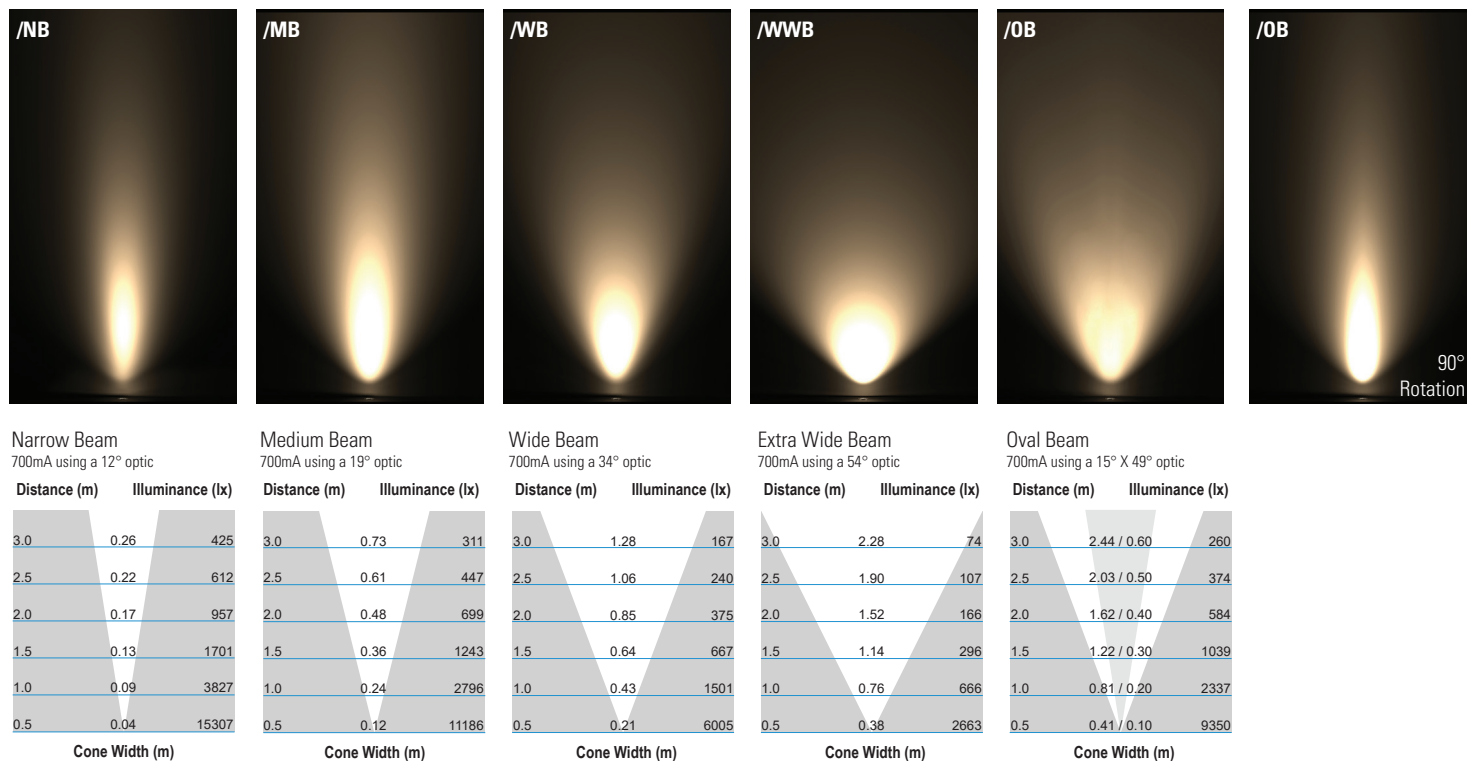


F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 10W. Images below represents beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD151T product page on the website.

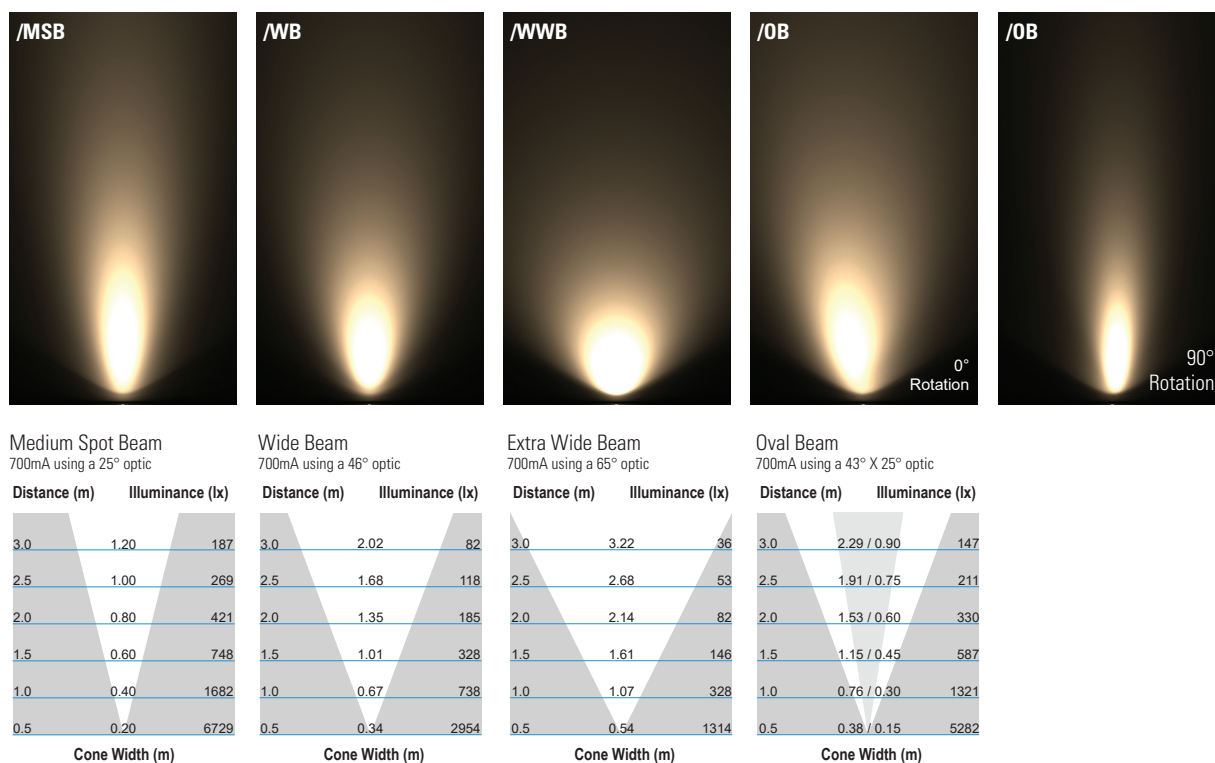

INSTALLATION GUIDE

Below is a luminaire positioning guide for white LEDs. Every project and lighting scenario will be different; the table below is to be used as a starting point for any wall wash design. Please use our photometric files to further test the desired effect for your application. Files are available on our LD151T product page on our website.

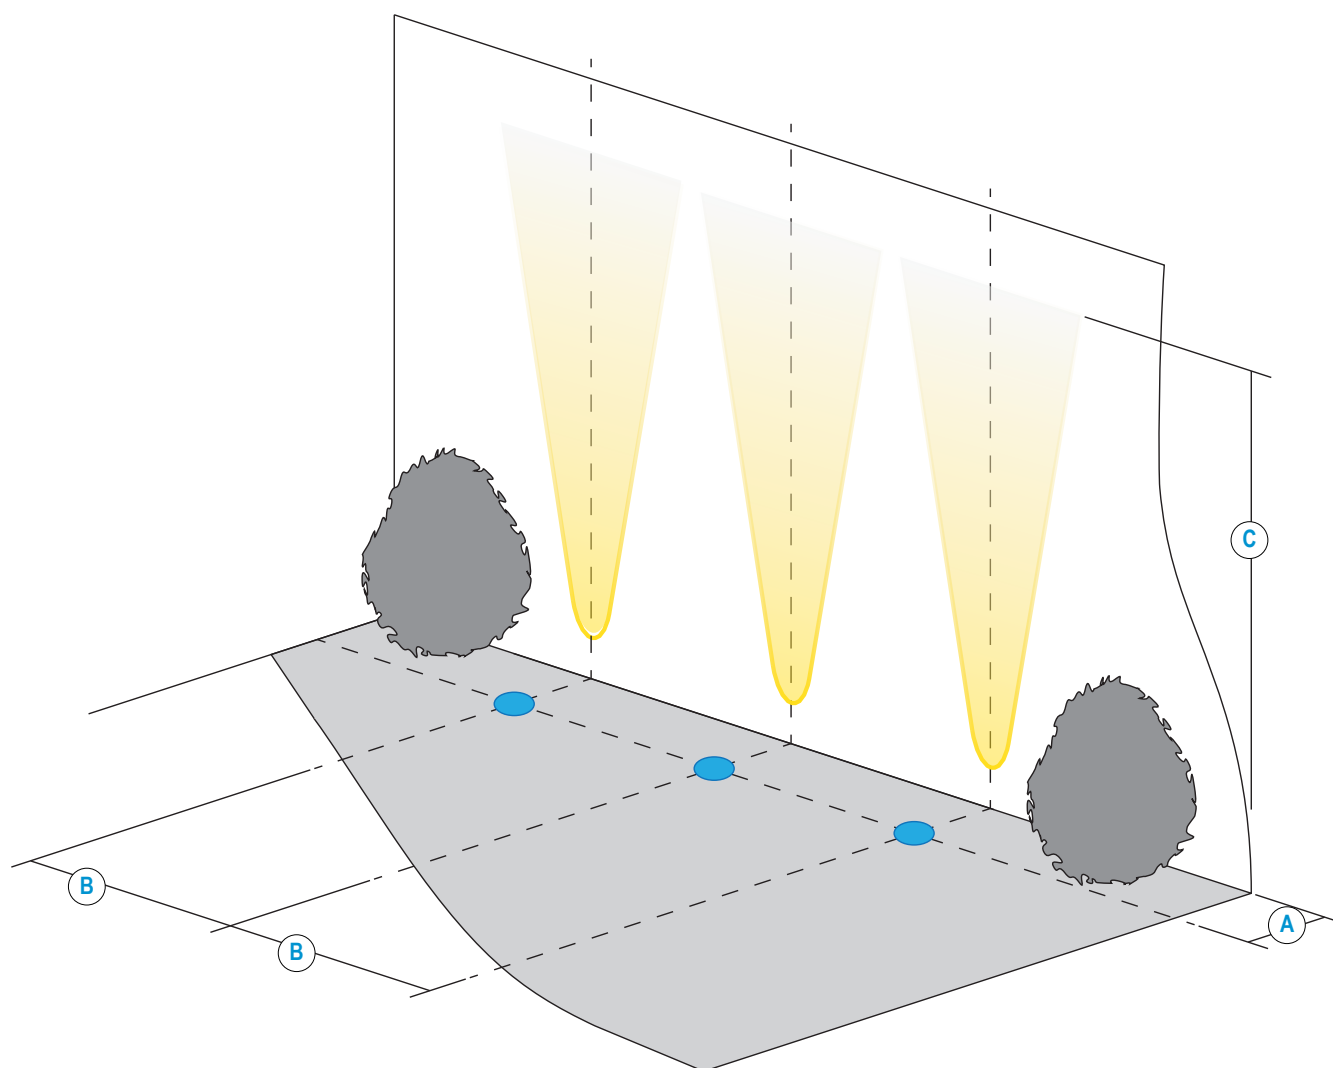

LD151T-E3		/NB	/MB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	250mm				
B	Spacing for an even wash	250mm*	350mm	400mm	500mm	500mm
C	500mA Lit distance	7m	4.5m	3.5m	2m	4m
C	700mA Lit distance	9m	7m	5m	3m	6m

LD151T-F1		/MSB	/WB	/WWB	/OB
A	Distance from the centre of the fitting to the lit surface	250mm			
B	Spacing for an even wash	250mm*	350mm	400mm	500mm
C	500mA Lit distance	3.5m	2.5m	2m	2.5m
C	700mA Lit distance	5m	3.5m	3m	3.5m

*Wall washing using narrow beam optics should only be used if the designer requires long distance lighting up the lit surface.

ORDER CODES & OPTIONS

Example: LD151-E3-700 / LW30 / NB / NGS / STAINLESS STEEL / 484N

Light Engine & Drive Current

LED Colour

Beam Angle

Glare shield

Finish

Fixing Accessories

	/		/		/		/	
--	---	--	---	--	---	--	---	--



E3

5W LED at 350mA	LD151T-E3-350
7W LED at 500mA	LD151T-E3-500
10W LED at 700mA	LD151T-E3-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) on request	/LW40
Cool White (5000K)	/LW50

12° Narrow spot	/NB
19° Medium	/MB
34° Wide	/WB
54° Extra wide	/WWB
15° x 49° Oval	/OB



F1

3.5W LED at 350mA	LD151T-F1-350
5W LED at 500mA	LD151T-F1-500
7W LED at 700mA	LD151T-F1-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) on request	/LW40
Cool White (5000K)	/LW50

25° Medium spot	/MSB
46° Wide	/WB
65° Extra wide	/WWB
43° x 25° Oval	/OB

Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers
We have a range of dimmable LED drivers DMX and DALI compatible. Please see the downloads section on our website.