



LD790

ADJUSTABLE COMPACT INTERIOR/ EXTERIOR LED DOWNLIGHT

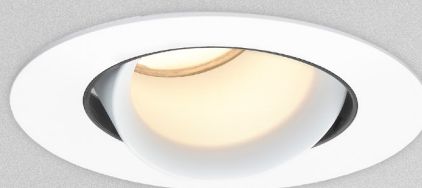

The compact LD790 has an excellent size to output ratio that is ideal for general downlighting and the highlighting of walls and columns within interior, exterior and marine applications. Featuring a wide range of paint finish options, the aluminium bezel has a diameter of just 60mm and houses a deep recessed optic for ultra low glare. The adjustable lens assembly can be tilted up to 30° to allow ultimate flexibility when focusing the product. Available LED engines include E3 and F1, offering colour temperatures of 2200K-5000K and a variety of beam angles, including a tight 12° narrow beam and medium options for general downlighting. Though compact, the LD790 provides brilliant thermal and light output performance, with a single optic generating a superior beam shape and no multiple shadows.

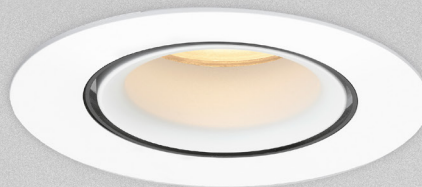


KEY FEATURES

- > Very low glare with deep recessed optic set back 26mm
- > Black anti-glare ring (see diagram) to prevent glare when tilted
- > Single optic for superior beam shapes with no multiple shadows
- > Compact powerful fitting delivering 433lm in 3000K
- > Tight 12° narrow spot beam available
- > Machined aluminium bezel available in a wide range of finishes; White (RAL 9016), Black (RAL 9005), Silver, Antique Bronze, Satin Antique Brass, Satin Brass, Anthracite Grey (RAL 7016) or any RAL paint finish
- > 30° tilt adjustability for ultimate flexibility
- > Versatile fitting rated IP65, ideal for interior and exterior projects including marine, hospitality and residential general downlighting, column and wall washing
- > Features our E3 & F1 LED engines which are used across our uplight and surface mounted products enabling colour and beam consistency across a project
- > E3 engine features reverse polarity protection
- > F1 COB engine with super warm 2200K option and 90+ CRI
- > Switched, 0-10V, Casambi, DMX, DALI, or Mains dimmable drivers available




DIMENSIONS

Dimensions in mm

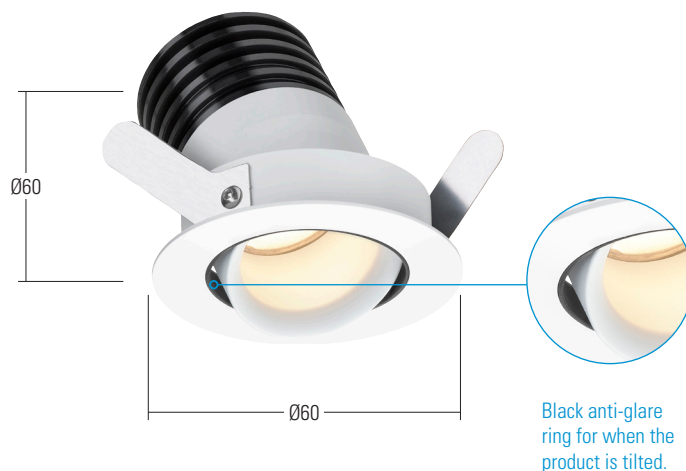For fitting dimensions please go to page 3.



LED ENGINE SPECIFICATION

Engine	 E3	 F1
Beam angles	12°, 26°	21°, 28°
LED manufacturer	NICHIA	CREE
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K	2200K, 2700K, 3000K, 4000K, 5000K
Current	350mA	350mA
LED power (Max)	4.2W (5W**)	3.2W (3.5W**)
Delivered lumens (L ₁₀₀)	328	256
Lumens per circuit watt	66	81
CRI (Typ)	85	90
Forward voltage (V ₁₀₀)	14V	9V
Colour consistency	2 SDCM	3 SDCM
Peak intensity	4359 cd	2201 cd
LED lumens (at max output)	596	715
LOR	0.73	0.59
TM30	86	90.1
UGR***	12.8	18.6
LED lifetime	L90B5 at 90,000hrs	L80B5 at 80,000hrs
Applications		

These values are based around a LD790-E3-500-LW30-NB & LD790-F1-700-LW30-MSB

*Lumen output data applies to all colour temperatures

**indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver

*** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

Ambient temperature	-20°C to 45°C (350mA) or -20°C to 35°C (500mA)
Glass	Low iron clear glass, 1mm thick
Materials	Aluminium bezel, black anodised aluminium body
Weight of product	0.14kg
IP rating	IP65
Wiring	In-series constant current wiring (pre-wired with cables at a length of 190mm)

ENVIRONMENTAL

TM65	Available on request
TM66	2.5

AVAILABLE FINISHES

Please refer to our finishes guide for full details

The LD790 bezel is machined from aluminium and painted in-house at LightGraphix. Wet spray paint finishes are suitable for interior, exterior and high saline marine environments. Our standard colours are below but we can accommodate any RAL request.



WHITE (RAL 9016)



BLACK (RAL 9005)



SILVER ANODISED



ANTIQUE BRONZE




SATIN ANTIQUE BRASS



SATIN BRASS



ANTHRACITE GREY (RAL 7016)






RAL

DIMENSIONS & FIXING OPTIONS

Dimensions in mm

2 x spring clips are supplied as standard and provide a simple single-fix mounting method. Suitable for use in surfaces with a thickness of 5mm – 25mm.

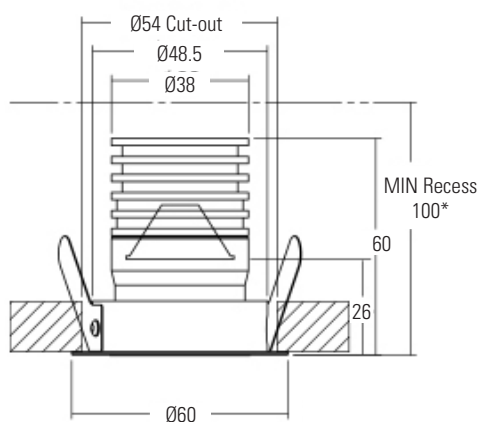

*see ceiling requirements table for more information

CONE DIAGRAMS

E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 500mA, 7W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD790 product page on the website.

Narrow Spot Beam 500mA using a 12° optic

Distance (m)	Illuminance (lx)
0.5	1715
1.0	4379
1.5	1946
2.0	1095
2.5	701
3.0	487

Cone Width (m)

Medium Beam 500mA using a 26° optic

Distance (m)	Illuminance (lx)
0.5	5258
1.0	1315
1.5	584
2.0	329
2.5	210
3.0	146

Cone Width (m)

F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 7W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD790 product page on the website.

Medium Spot Beam 700mA using a 21° optic

Distance (m)	Illuminance (lx)
0.5	9068
1.0	2267
1.5	1008
2.0	567
2.5	363
3.0	252

Cone Width (m)


Medium Beam 700mA using a 28° optic

Distance (m)	Illuminance (lx)
0.5	5451
1.0	1363
1.5	606
2.0	341
2.5	218
3.0	151

Cone Width (m)

CEILING VOID REQUIREMENTS

Installation requirements can vary but the minimum installation volume requirements must be adhered to. The volume of air within the void ensures that the thermal performance of the product is not compromised and that proper cooling of the LED can take place. The minimum void height is 100mm.

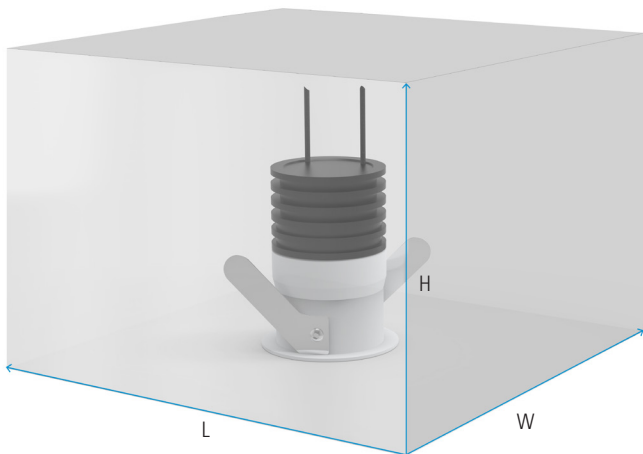

















E3 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm³	Litre(s)
LD790-E3-350	200 x 200 x 70	2800cm³	2.8
LD790-E3-500	200 x 200 x 100	4000cm³	4

F1 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm³	Litre(s)
LD790-F1-350	200 X 200 X 70	2800cm³	2.8
LD790-F1-500			
LD790-F1-700	200 X 200 X 100	4000cm³	4

ORDER CODES & OPTIONS

Example: LD790-E3-500 / LW30 / NB / WHITE

Light Engine & Drive Current		LED Colour		Beam Angle		Finish																																	
LD790 -																																							
<div> <div>  E3 </div> <table border="1"> <tr> <td>5W LED at 350mA</td> <td>LD790-E3-350</td> <td>Super Warm White (2200K)</td> <td>/LW22</td> <td>12° Narrow spot</td> <td>/NB</td> <td rowspan="4">  </td> </tr> <tr> <td>7W LED at 500mA</td> <td>LD790-E3-500</td> <td>Extra Warm White (2700K)</td> <td>/LW27</td> <td>26° Medium</td> <td>/MB</td> </tr> <tr> <td></td> <td></td> <td>Warm White (3000K)</td> <td>/LW30</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>White (4000K) - on request</td> <td>/LW40</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>Cool White (5000K)</td> <td>/LW50</td> <td></td> <td></td> <td></td> </tr> </table> </div>								5W LED at 350mA	LD790-E3-350	Super Warm White (2200K)	/LW22	12° Narrow spot	/NB		7W LED at 500mA	LD790-E3-500	Extra Warm White (2700K)	/LW27	26° Medium	/MB			Warm White (3000K)	/LW30					White (4000K) - on request	/LW40					Cool White (5000K)	/LW50			
5W LED at 350mA	LD790-E3-350	Super Warm White (2200K)	/LW22	12° Narrow spot	/NB																																		
7W LED at 500mA	LD790-E3-500	Extra Warm White (2700K)	/LW27	26° Medium	/MB																																		
		Warm White (3000K)	/LW30																																				
		White (4000K) - on request	/LW40																																				
		Cool White (5000K)	/LW50																																				
<div> <div>  F1 </div> <table border="1"> <tr> <td>3.5W LED at 350mA</td> <td>LD790-F1-350</td> <td>Super Warm White (2200K)</td> <td>/LW22</td> <td>21° Medium spot</td> <td>/MSB</td> <td rowspan="4">  </td> </tr> <tr> <td>5W LED at 500mA</td> <td>LD790-F1-500</td> <td>Extra Warm White (2700K)</td> <td>/LW27</td> <td>28° Medium</td> <td>/MB</td> </tr> <tr> <td></td> <td></td> <td>Warm White (3000K)</td> <td>/LW30</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>White (4000K) - on request</td> <td>/LW40</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>Cool White (5000K)</td> <td>/LW50</td> <td></td> <td></td> <td></td> </tr> </table> </div>								3.5W LED at 350mA	LD790-F1-350	Super Warm White (2200K)	/LW22	21° Medium spot	/MSB		5W LED at 500mA	LD790-F1-500	Extra Warm White (2700K)	/LW27	28° Medium	/MB			Warm White (3000K)	/LW30					White (4000K) - on request	/LW40					Cool White (5000K)	/LW50			
3.5W LED at 350mA	LD790-F1-350	Super Warm White (2200K)	/LW22	21° Medium spot	/MSB																																		
5W LED at 500mA	LD790-F1-500	Extra Warm White (2700K)	/LW27	28° Medium	/MB																																		
		Warm White (3000K)	/LW30																																				
		White (4000K) - on request	/LW40																																				
		Cool White (5000K)	/LW50																																				
						<div>  </div> <div>Paint Finish White (RAL 9016)</div>																																	
						<div>  </div> <div>Paint Finish Black (RAL 9005)</div>																																	
						<div>  </div> <div>Paint Finish Silver Anodised</div>																																	
						<div>  </div> <div>Paint Finish Antique Bronze</div>																																	
						<div>  </div> <div>Paint Finish Satin Antique Brass</div>																																	
						<div>  </div> <div>Paint Finish Satin Brass</div>																																	
						<div>  </div> <div>Paint Finish Anthracite Grey (RAL 7016)</div>																																	
						<div>  </div> <div>Paint Finish RAL</div>																																	

Drivers

Use with 350mA, 500mA & 700mA constant current LED drivers

We have a wide range of LED drivers available. Please see the downloads section of our website.