

## LD53 EXTERIOR RATED, LOW LEVEL, DIFFUSED, 360°, LANDSCAPE ACCENT LIGHT




The LD53 exterior landscape accent light is designed to wash surfaces with a soft glow, highlighting specific areas of interest. With a custom LightGraphix reflector and LED array, it offers a wide, low-level, 360°, diffused wash of light from a very compact fitting. It is available in RGBW or standard white colour temperatures from 2400K to 5000K. An optional adjustable head is available, allowing up to 20° tilt via an innovative toolless adjustable locking mechanism, allowing quick onsite adjustment. This versatile product can be used in-ground, on tabletops and on walls, allowing for a consistent lighting effect across a project and can be further enhanced through our wide range of paint finishes.








## KEY FEATURES

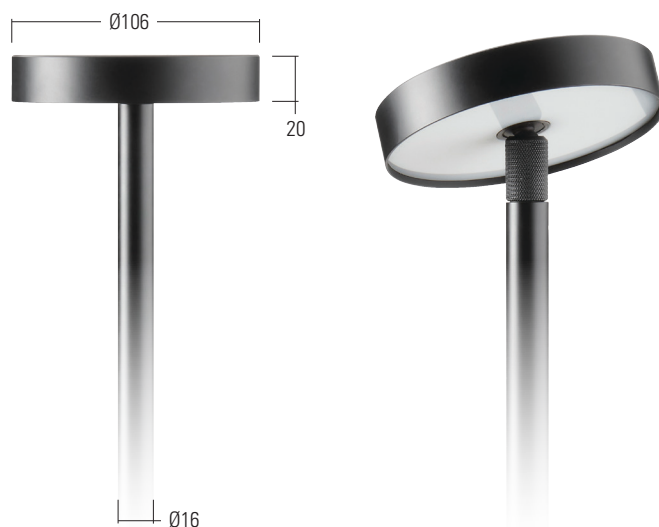- > Provides a wide, low-level, 360°, diffused wash of light from a very compact fitting, with very low glare
- > Minimalist and timeless design
- > Wide range of white LED colours from 2400K to 5000K
- > RGBW light engine available with incredible colour mixing capability
- > 24V input allowing multiple fitting to be wired in parallel
- > Optional adjustable head can be tilted up to 20° and locked using knurled collar for toolless on-site focusing
- > Wide range of fixing options and Ground Spike heights, as well as a Surface Mount Base, and Surface Mount Base Extended
- > Dark sky lighting is achieved by focussing the light down and using a semi-recessed opal diffuser and optics, allowing for no upward spill of light
- > Features an anti-wicking barrier to increase protection against moisture ingress
- > Wide range of wet spray and textured paint finishes available including: White (RAL 9016), Silver anodised, Anthracite Grey (RAL 7016), Black (RAL 9005), Antique Bronze, Satin Antique Brass, Satin Brass, Textured Fir Green (RAL 6009), Textured Mars Bronze (SX350F) or any RAL finish
- > Switched, 0-10V, Casambi, DMX, DALI or Mains dimmable drivers/controllers available

## DIMENSIONS



## LED ENGINE SPECIFICATION

Engine	 LG2000		 RGBW			
LED manufacturer	Osram		Osram			
Colour temperature	2400K, 2700K, 3000K, 4000K, 5000K		Red	Green	Blue	White (4000K)
LED power (Max)	5.4W		2.7W	2.3W	1.8W	3.6W
Delivered lumens (L <sub>100</sub> )	310		25.6	45	6.18	116
Lumens per circuit watt	44		9.6	19.7	3.4	31.7
CRI (Typ)	93.5		-			
Forward voltage (V <sub>100</sub> )	24V constant voltage		24V constant voltage			
Colour consistency	3 SDCM		-			
Peak intensity	110 cd		8.75cd	15.3cd	2.07cd	39.9cd
LED Lumens	540lm		382.5lm			
LOR	0.57		0.57			
TM30	RF90.8	RG102.3	-			
LED lifetime	50,000hrs (to 70% lumen output)					
Applications	  					

These values are based around a LD53/27K and an LD53/RGBW

## MECHANICAL

Ambient temperature	LF2000	-20°C to 50°C
	RGBW	-30°C to 50°C
Diffuser	3mm Acrylic Opal 050	
Materials	Anodised aluminium 6026 body and ground spike	
Weight of product	392g	
IP rating	IP65	
Wiring	Parallel constant voltage wiring 24V	

## ENVIRONMENTAL

TM65	Available on request
TM66	2.5

## AVAILABLE FINISHES

*Please refer to our finishes guide for full details*

The LD53 body and ground spikes are machined from aluminium, anodised, and then painted in-house at LightGraphix. Paint finishes are suitable for interior and exterior use. Our standard colours are below but we can accommodate any RAL request. Please view our full finishes guide online for more information.

### WET SPRAY

Wet spray paint offers a fine coating and has a realistic metallic finish. It is suitable for interior, exterior and high-saline environments.



**BLACK**  
(RAL 9005)



**WHITE**  
(RAL 9016)



**SILVER ANODISED**



**ANTIQUE BRONZE**



**SATIN ANTIQUE BRASS**




**SATIN BRASS**



**ANTHRACITE GREY**  
(RAL 7016)



**TEXTURED FIR GREEN**



**RAL COLOURS**

### POWDER COAT

Powder coat paint is offered in special textured finishes, which are suitable for interior, exterior and high-saline environments.



**TEXTURED MARS BRONZE**  
(SX350F)

## ADJUSTABILITY

LD53 is available with an adjustable head with 20° lockable tilt, for applications that require the light to be angled away which can help with reducing glare. An innovative knurled collar allows for toolless easy on-site focusing and locking of the tilt.






LD53/27K/Black/GS1536

## WHITE & RGBW LED ENGINES

The LD53 has excellent RGBW capabilities. With the 5-core cable you are able to set the LED to any shade on the colour spectrum, easily adapting to any environment. The fitting is also available in all of our standard colour temperatures, including very warm white 2400K.

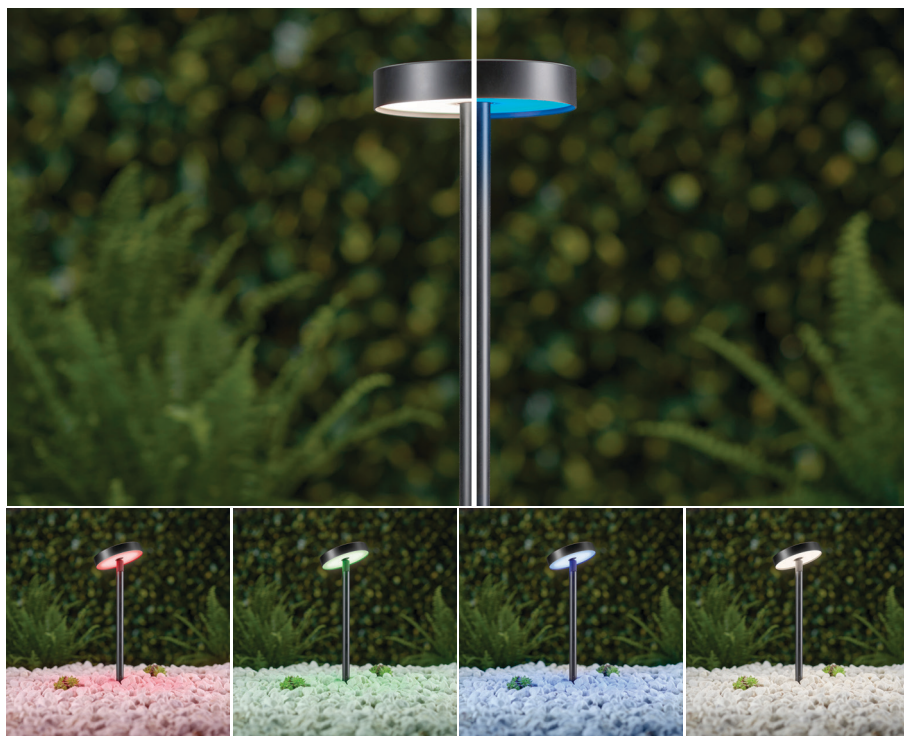

## OPAL DIFFUSER

The LightGraphix reflector, LED array and opal diffuser creates a wide, diffused wash of light with no spotting of the LEDs. The addition of a lip protruding beyond the diffuser works to reduce visual glare.




## DIMENSIONS & FIXING OPTIONS

Dimensions in mm


### /GSF53-6/9/12 Fixed Ground Spike 600mm, 900mm or 1200mm

The Fixed Ground Spike is manufactured out of aluminium and is available in three lengths, 600mm, 900mm or 1200mm, painted to match the body.

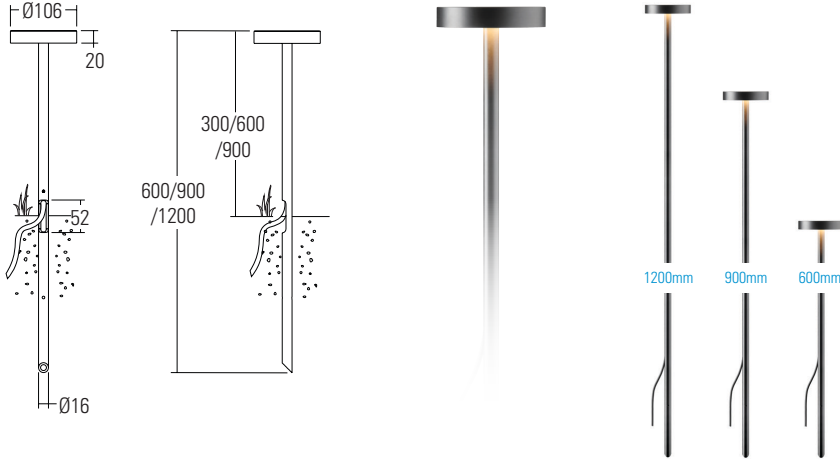


### /GSAT53-6/9/12 Ground Spike with Adjustable Tilt 627mm, 927mm or 1227mm

The Ground Spike with Adjustable Tilt is manufactured out of aluminium and is available in three lengths, 600mm, 900mm or 1200mm, painted to match the body, including a lockable and tiltable head up to 20°.

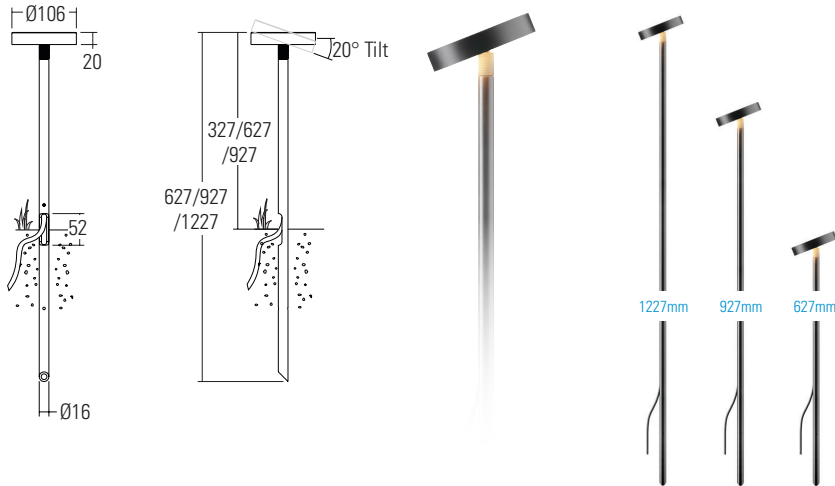

### /GSP Ground Spike Plate

Gives extra support for applications with soft ground by being buried attached to the ground spike stem. Stainless Steel, un-painted.


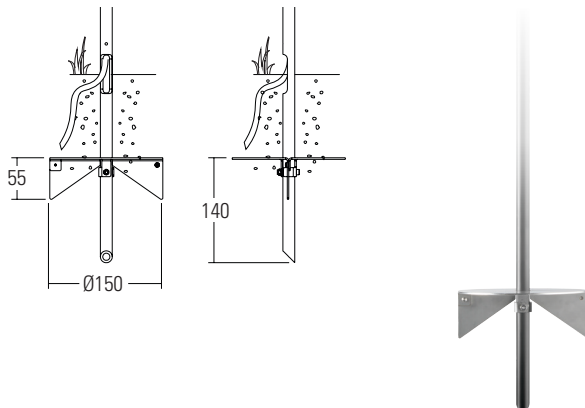




### /SMB53

#### Surface Mount Base



Surface Mount Base is supplied as standard with a very short stem and minimal fixings, for wall or accent light applications. The cable can either be hidden and routed through the mounting surface or run through the side of the base via a removable grub screw.



### /SMBEX53-100/200/300

#### Surface Mount Base Extended 100/200/300mm




SMBEX offers hidden wiring and strong base plate for solid surface applications, allowing the fitting to be screwed down directly. The cable can either be hidden and routed through the mounting surface or run through the side of the base via a removable grub screw. Available in 100mm length increments from 100mm up to 300mm.



### /SMBEXAT53-100/200/300

#### Adjustable Tilt Surface Mount Base Extended 100/200/300mm

The SMBEX with Adjustable Tilt offers hidden wiring and allows the fitting to be screwed directly onto the solid mounting surface, as well as a lockable and tiltable head up to 20°. The cable can either be hidden and routed through the mounting surface or run through the side of the base via a removable grub screw. Available in 100mm increments from 100mm up to 300mm.

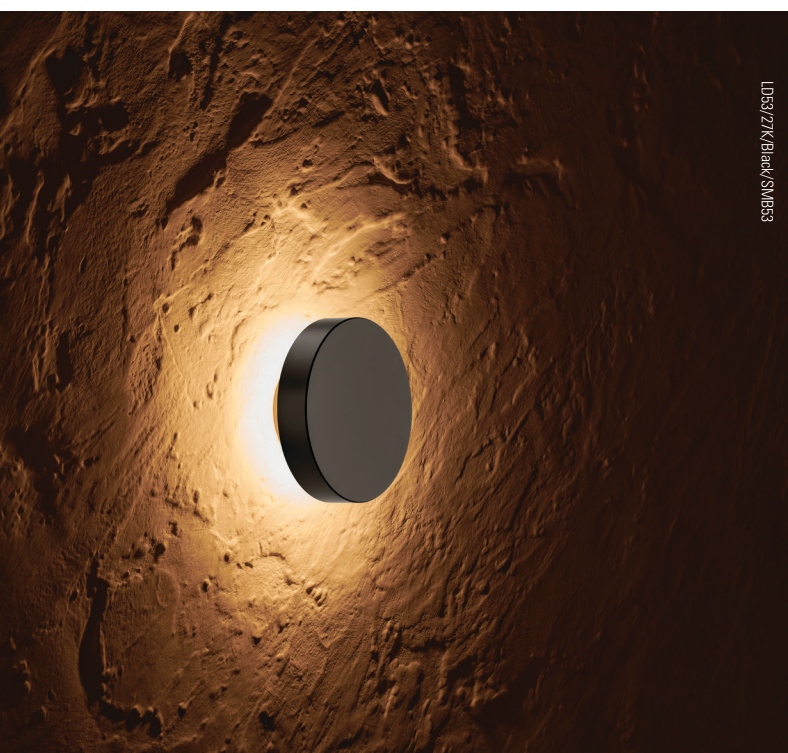

LD53/27K/Black/SMB53



LD53/27K/Black/SMBEX53

## ORDER CODES & OPTIONS

Example: LD53/27K/Black/GSAT53-6

Light Engine & Drive Current

LED Colour

Finish

Fixings & Accessories

LD53

/

/

/



White

24V 5.4W

LD53 (LG2000)

Very Warm White  
(2400K)

/LW24

Extra Warm White  
(2700K)

/LW27

Warm White  
(3000K)

/LW30

White (4000K)  
- on request

/LW40

Cool White  
(5000K)

/LW50



RGBW

24V 5.4W

LD53-RGBW



WET SPRAY  
/Black  
(RAL 9005)



WET SPRAY  
/White  
(RAL 9016)



WET SPRAY  
/Silver Anodised



WET SPRAY  
/Antique Bronze



WET SPRAY  
/Satin Antique Brass



WET SPRAY  
/Satin Brass



WET SPRAY  
/Anthracite Grey  
(RAL 7016)



WET SPRAY  
/Textured Fir Green  
(RAL 6009)



POWDER COAT  
/Textured Mars Bronze  
(SX350F)



PAINT FINISH  
/Any RAL



/GSF53-6

/GSF53-9

/GSF53-12



/GSAT53-6

/GSAT53-9

/GSAT53-12



/GSP53



/SMB53



/SMBEX53-100

/SMBEX53-200

/SMBEX53-300



/SMBEXAT53-100

/SMBEXAT53-200

/SMBEXAT53-300

### Drivers

To be used with 24V constant voltage LED Drivers and Controllers  
We offer a range of drivers with 1-10V, DMX, and DALI dimming options.  
Please download the data sheet from the downloads section at  
[www.lightgraphix.co.uk](http://www.lightgraphix.co.uk), or contact us for more information.