

LD780


FIXED COMPACT INTERIOR/EXTERIOR LED DOWNLIGHT



R+R



The compact LD780 has an excellent size to output ratio that is ideal for general downlighting and the highlighting of walls and columns within interior, exterior and marine applications. With a diameter of just 46mm, the aluminium bezel can be specified in a wide range of paint finishes and features a deep recessed optic within the body to ensure ultimate low glare. Available LED engines include E3 and F1, offering colour temperatures of 2200K-5000K and a variety of beam angles, including a tight 12° narrow beam with medium options for more general downlighting. Though compact, the LD780 provides brilliant thermal and light output performance, with a single optic generating a superior beam shape and no multiple shadows.

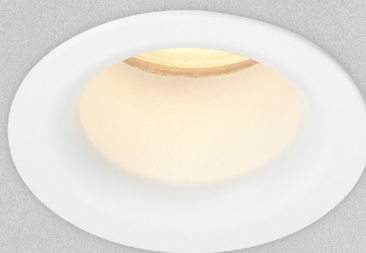


KEY FEATURES

- > Very low glare with deep recessed optic set back 26mm
- > Single optic for superior beam shapes with no multiple shadows
- > Compact powerful fitting delivering 433lm in 3000K
- > Tight 12° narrow spot beam available
- > Machined aluminium bezel available in a wide range of finishes; White (RAL 9016), Black (RAL 9005), Silver, Antique Bronze, Satin Antique Brass, Satin Brass, Anthracite Grey (RAL 7016) or any RAL paint finish
- > Versatile fitting rated IP65, ideal for interior and exterior projects including marine, hospitality and residential general downlighting, column and wall washing
- > Features our E3 & F1 LED engines which are used across our uplight and surface mounted products enabling colour and beam consistency across a project
- > E3 engine features reverse polarity protection
- > F1 COB engine with super warm 2200K option and 90+ CRI
- > Switched, 0-10V, Casambi, DMX, DALI, or Mains dimmable drivers available





DIMENSIONS

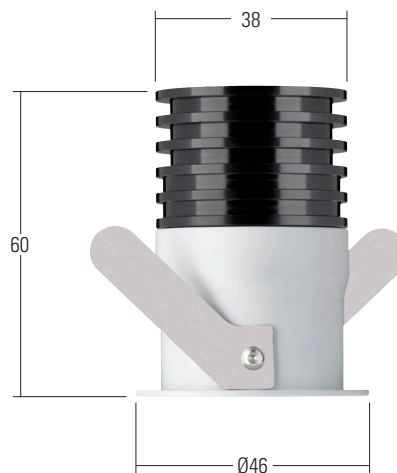Dimensions in mm

For fitting dimensions please go to page 3.



LED ENGINE SPECIFICATION

Engine	⊕ E3		⊙ F1		
Beam angles	12°, 26°		21°, 28°		
LED manufacturer	NICHIA		CREE		
Colour temperature*	2200K, 2700K, 3000K, 4000K, 5000K		2200K, 2700K, 3000K, 4000K, 5000K		
Current	350mA [5W]	500mA [7]	350mA [3.5W]	500mA [5W]	700mA [7W]
LED power (Max)	4.2	6.0	3.2W	4.5W	6.3W
Delivered lumens (L ₁₀₀)	328	433	256	330	420
Lumens per circuit watt	66	62	81	73	67
CRI (Typ)	85		90		
Forward voltage (V ₁₀₀)	14V		9V		
Colour consistency	2 SDCM		3 SDCM		
Peak intensity	4,359 cd		2,201 cd		
LED lumens (at max output)	596		715		
LOR	0.73		0.54		
TM30	RF86 RG98		RF90.1 RG102.2		
UGR***	12.8		18.6		
LED lifetime	L90B5 at 90,000hrs		L80B5 at 80,000hrs		
Applications	   				

These values are based around a LD780-E3-500-LW30-NB & LD790-F1-700-LW30-MSB

*Lumen output data applies to all colour temperatures

**indicates the nominal power for the LED run at that particular current and includes losses associated with using an 85% efficient driver


*** UGR values based on room parameters of 4H 8H, C70 W50 F20

MECHANICAL

		350mA	500mA	700mA
Ambient temperature ● 55°C	E3	-20°C to 55°C	-20°C to 35°C	-
	F1	-20°C to 55°C	-20°C to 40°C*	-20°C to 40°C*
Glass	Low iron clear glass, 1mm thick			
Materials	Aluminium bezel, black anodised aluminium body			
Weight of product	0.12kg			
IP rating	IP65			
Wiring	In-series constant current wiring (pre-wired with cables at a length of 190mm)			

*When used in a 120x120x70 void

ENVIRONMENTAL

TM65	Available on request	
TM66	2.5	
Repair + Refurbish	 <p>This product is included in our Repair and Refurbish scheme. This offers customers the ability to send back products to us for repair or refurbishment to extend their life without having to buy new fittings.</p>	

AVAILABLE FINISHES

Please refer to our finishes guide for full details

The LD780 bezel is machined from aluminium and painted in-house at LightGraphix. Wet spray paint finishes are suitable for interior, exterior and high saline marine environments. Our standard colours are below but we can accommodate any RAL request.




WHITE (RAL 9016)




BLACK (RAL 9005)




SILVER ANODISED




ANTIQUE BRONZE



SATIN ANTIQUE BRASS



SATIN BRASS



ANTHRACITE GREY (RAL 7016)





RAL

DIMENSIONS & FIXING OPTIONS

Dimensions in mm

2 x spring clips are supplied as standard and provide a simple single-fix mounting method. Suitable for use in surfaces with a thickness of 5mm – 25mm.

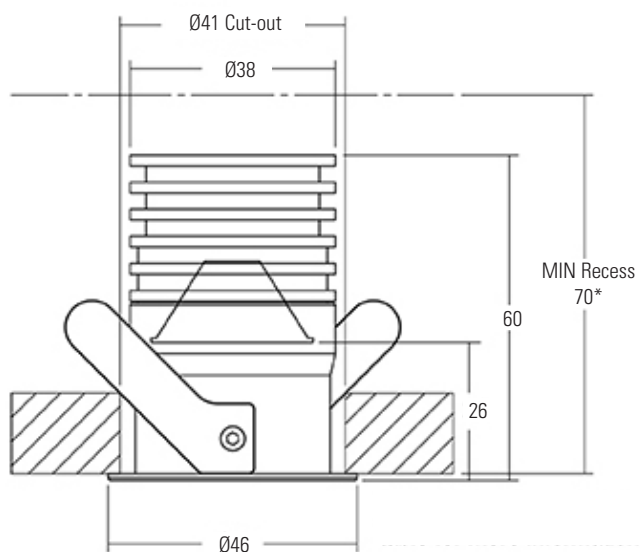

*see ceiling requirements table for more information

CONE DIAGRAMS

E3 LED Engine

Cone diagrams below are based on a 3000K E3 LED engine run at maximum output 500mA, 7W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD780 product page on the website.

Narrow Spot Beam 500mA using a 12° optic

Distance (m)	Illuminance (lx)
0.5	0.13
1.0	0.25
1.5	0.38
2.0	0.51
2.5	0.63
3.0	0.76

Cone Width (m)

Medium Beam 500mA using a 26° optic

Distance (m)	Illuminance (lx)
0.5	0.24
1.0	0.48
1.5	0.71
2.0	0.95
2.5	1.19
3.0	1.43

Cone Width (m)

F1 LED Engine

Cone diagrams below are based on a 3000K F1 LED engine run at maximum output 700mA, 7W. Images below represent beam outputs when wall washing a 3m wall, spaced 125mm away from the lit surface. Photometric files (LDT) are included in the design pack which can be downloaded from the LD780 product page on the website.

Medium Spot Beam 700mA using a 21° optic

Distance (m)	Illuminance (lx)
0.5	0.19
1.0	0.38
1.5	0.57
2.0	0.76
2.5	0.95
3.0	1.14

Cone Width (m)


Medium Beam 700mA using a 28° optic

Distance (m)	Illuminance (lx)
0.5	0.25
1.0	0.51
1.5	0.76
2.0	1.01
2.5	1.27
3.0	1.52

Cone Width (m)

CEILING VOID REQUIREMENTS

Installation requirements can vary but the minimum installation volume requirements must be adhered to. The volume of air within the void ensures that the thermal performance of the product is not compromised and that proper cooling of the LED can take place. The minimum void height is 70mm.

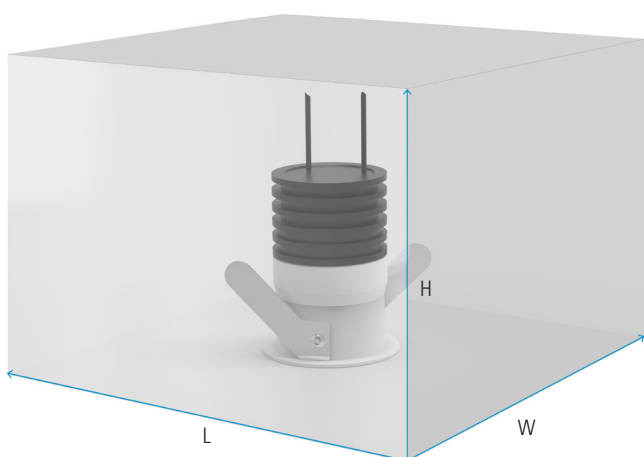

E3 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm³	Litre(s)
LD780-E3-350	120 x 120 x 70	1008cm³	1
LD780-E3-500	200 x 200 x 70	2800cm³	2.8

F1 LED			
Output current	Minimum void dimension requirements (Lmm x Wmm x Hmm)	Minimum void volume	
		cm³	Litre(s)
LD780-F1-350	120 x 120 x 70	1008cm³	1
LD780-F1-500	140 x 140 x 70	1372cm³	1.3
LD780-F1-700	200 x 200 x 70	2800cm³	2.8

Example: LD780-E3-500/LW30/NB/Paint finish White

Finish

LD780 - / / /


E3

5W LED at 350mA	LD780-E3-350
7W LED at 500mA	LD780-E3-500

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

12° Narrow spot	/NB
26° Medium	/MB

	Paint Finish White (RAL 9016)
	Paint Finish Black (RAL 9005)
	Paint Finish Silver Anodised
	Paint Finish Antique Bronze
	Paint Finish Satin Antique Brass
	Paint Finish Satin Brass
	Paint Finish Anthracite Grey (RAL 7016)
	Paint Finish RAL

F1

3.5W LED at 350mA	LD780-F1-350
5W LED at 500mA	LD780-F1-500
7W LED at 700mA	LD780-F1-700

Super Warm White (2200K)	/LW22
Extra Warm White (2700K)	/LW27
Warm White (3000K)	/LW30
White (4000K) - on request	/LW40
Cool White (5000K)	/LW50

21° Medium spot	/MSB
28° Medium	/MB

Drivers
Use with 350mA, 500mA & 700mA constant current LED drivers We have a wide range of LED drivers available. Please see the downloads section of our website.