

Light efficiency:



Light quality:



Color temperature:




Output: 44.7 lm

Peak: 198 cd

Power: 5.1 W

PF: 0.34

12 PLANES

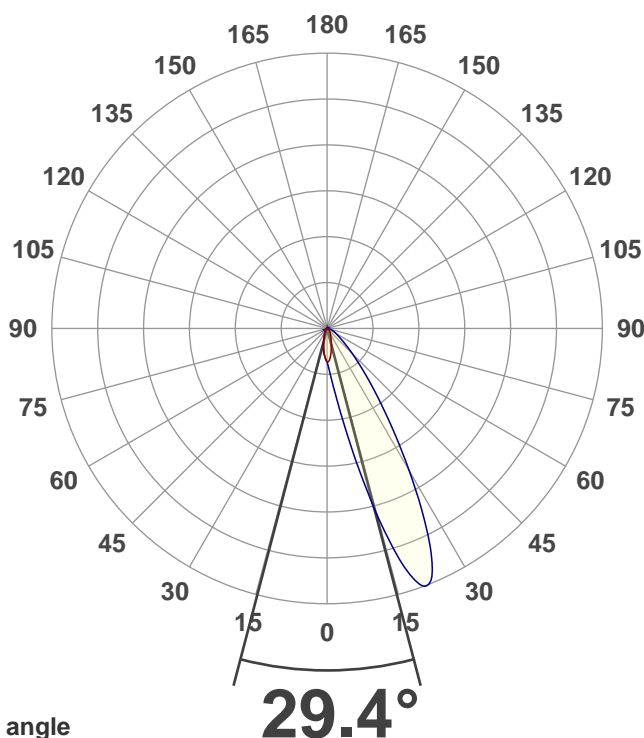

Color





CIE1931

x: 0.461

y: 0.407

Spectra

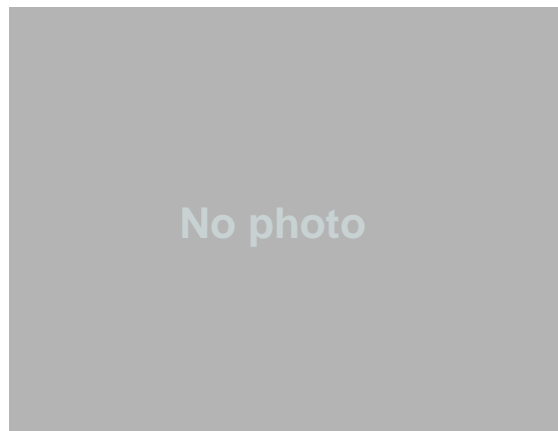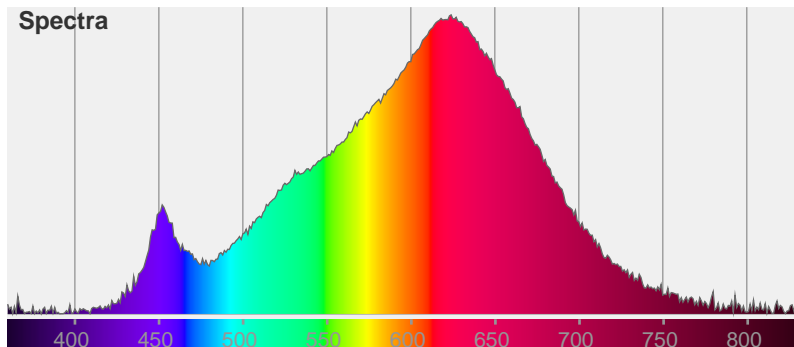

Tracking number: VT201214-000566

Product name:

LD42D-700-LW27-NB (14-12-20)


Date and time:



14/12/2020 10:05:47

Additional information:


20° TILT FILM WITH FROST & NB

POTENTIAL PUT FORWARD

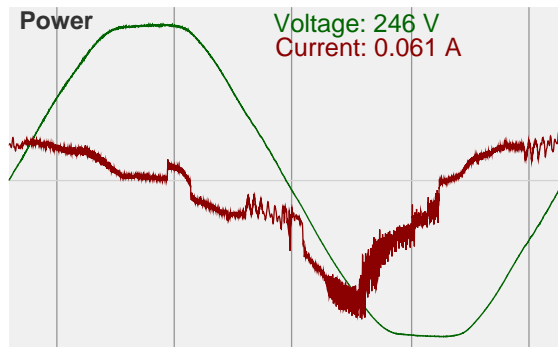


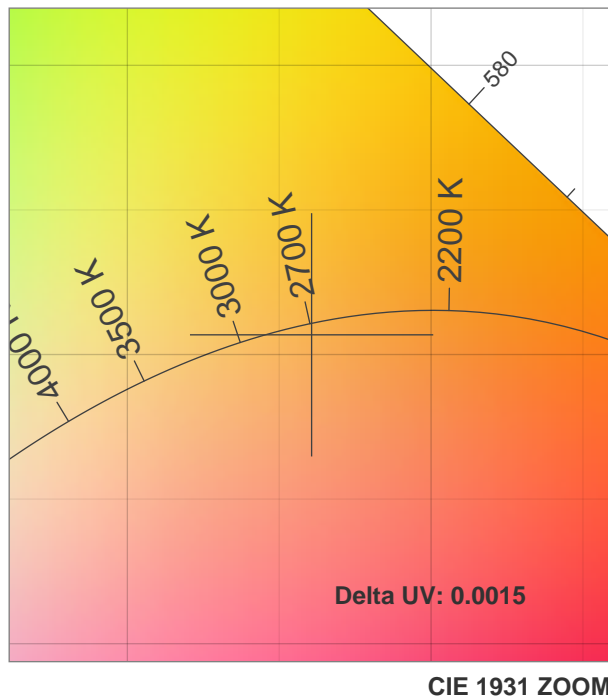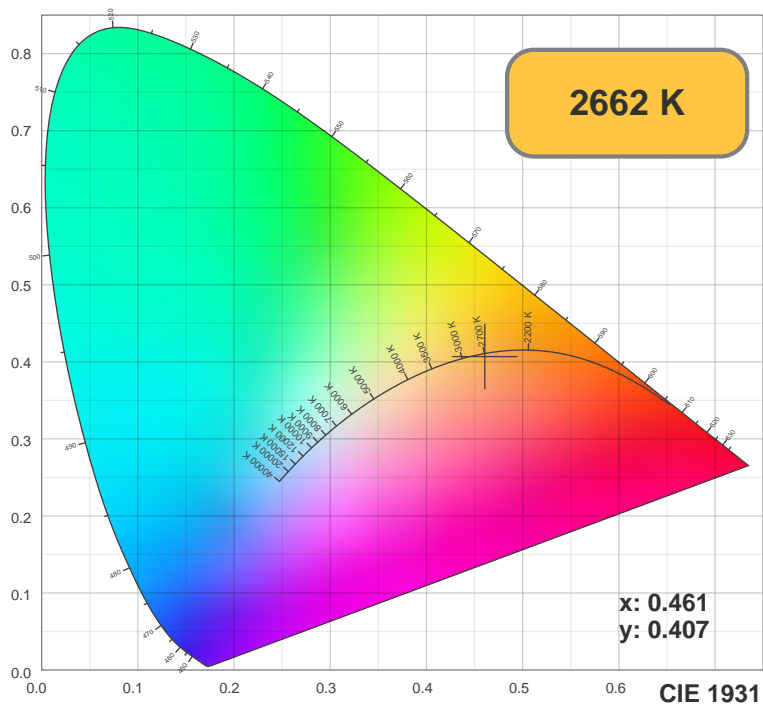

TM30: 90.5

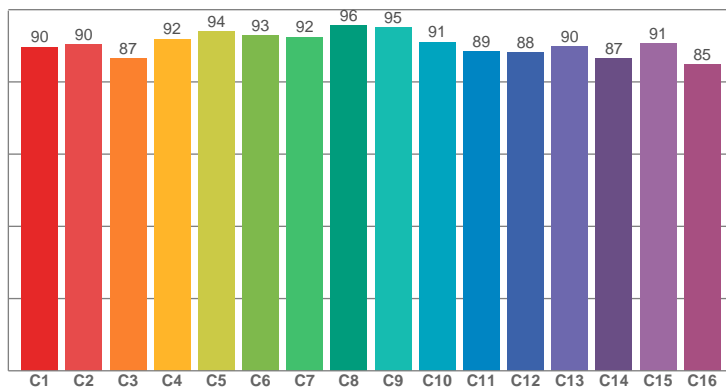

CRI: 92.7 (R1-R8)

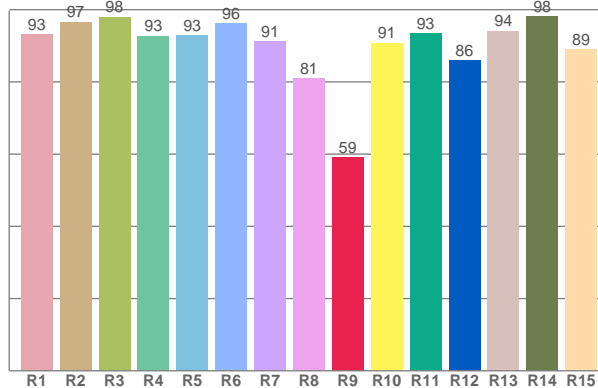

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
93.17	96.57	98.03	92.73	92.82	96.11	91.15	81.00	59.00	90.76	93.49	85.89	94.09	98.09	89.03


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.71	90.42	86.59	91.94	93.91	92.77	92.48	95.73	95.00	91.07	88.53	88.24	89.88	86.52	90.58	84.91

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
86.88	94.87	88.03	88.07	90.84	90.32	88.15	89.76	96.46	92.14	91.13	90.35	90.57	86.29	86.10

CQS: 89.5

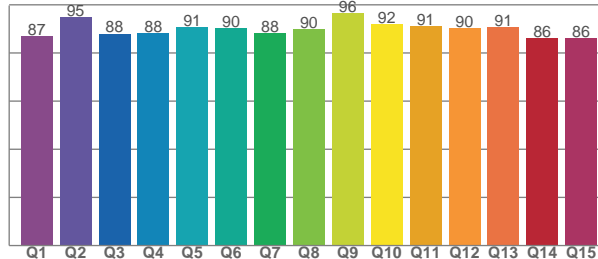

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
2662 K	92.7	59.0	90.5	100.5	89.5	0.5	0.4	0.3	0.4	-0.0015

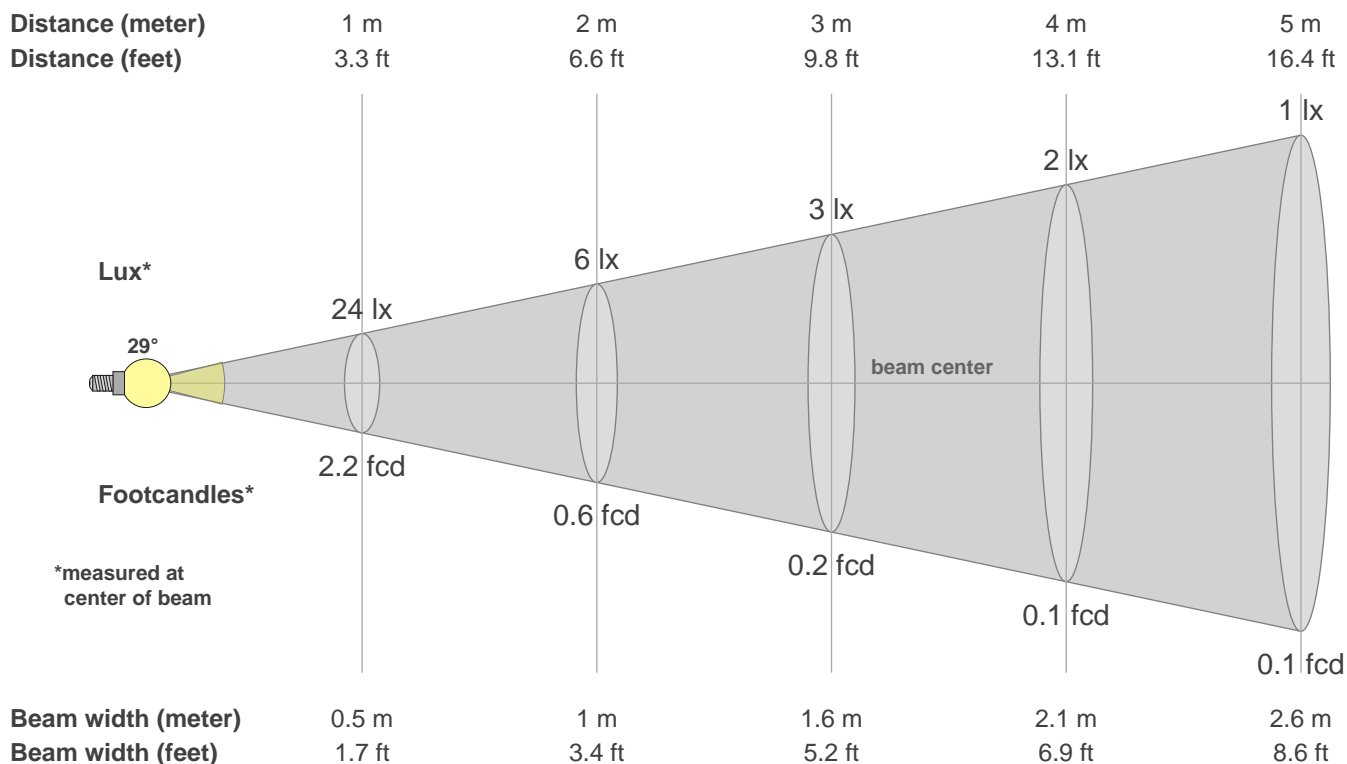

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
24	24	23	21	19	17	15	13	11	10	8	7	7	6	5	5	4	4	4	3
100%	99%	95%	88%	79%	70%	61%	53%	46%	40%	35%	31%	28%	25%	23%	20%	19%	17%	15%	14%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
24	28	34	42	53	71	95	124	154	181	197	196	185	166	143	119	98	80	65	53
100%	117%	140%	174%	221%	292%	393%	513%	639%	749%	814%	814%	767%	687%	590%	492%	405%	330%	268%	218%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
24	23	21	19	16	14	12	10	9	7	6	6	5	5	4	4	4	3	3	3
100%	95%	87%	78%	67%	58%	49%	42%	36%	31%	27%	24%	21%	19%	18%	16%	14%	13%	12%	11%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
24	23	21	19	18	15	13	10	8	7	5	4	3	2	1	1	0	0	0	0
100%	93%	86%	80%	73%	63%	52%	42%	34%	27%	22%	16%	12%	8%	5%	3%	2%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
29.4°	74.2°	108.2°	95.1%	84.9%